



GruppoNueva™



Sky  
eries

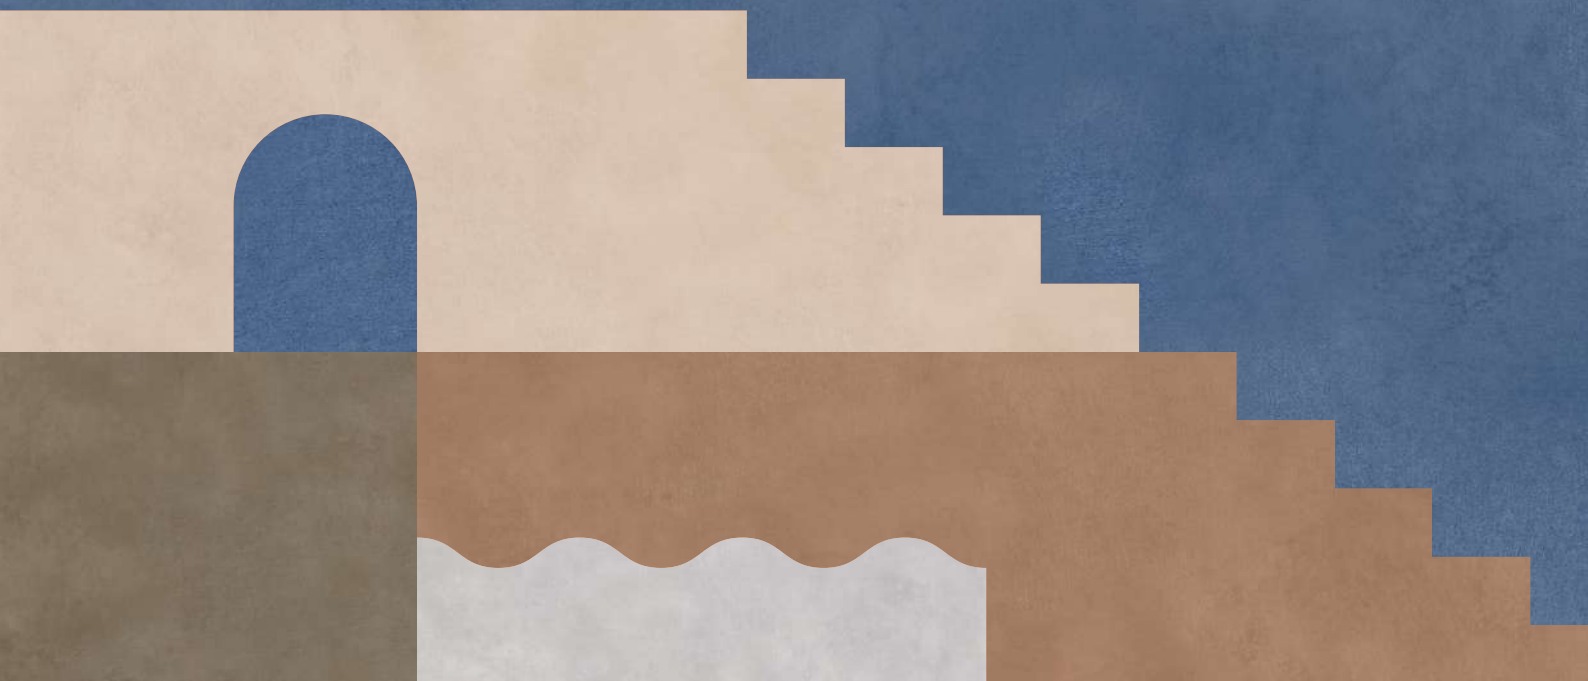

ELEVATE  
YOUR SPACE  
TO NEW  
HEIGHTS!

Sky  
eries

**Introducing Sky Color Tiles: Transform  
Your Space with Elegance and Style**


Are you ready to elevate your home or office space to new heights of sophistication? Look no further than Sky Color Tiles! Our exquisite range of tiles is designed to bring a touch of the serene beauty of the sky into your interiors, creating an atmosphere of tranquility and luxury.



## Unmatched Quality and Durability

At Sky Color Tiles, we understand that quality is paramount when it comes to home decor. That's why each tile in our collection is crafted with the finest materials and superior attention to detail. Our tiles are not only aesthetically pleasing but also built to withstand the test of time, ensuring that your space remains stunning for years to come.

# GruppoNueva™

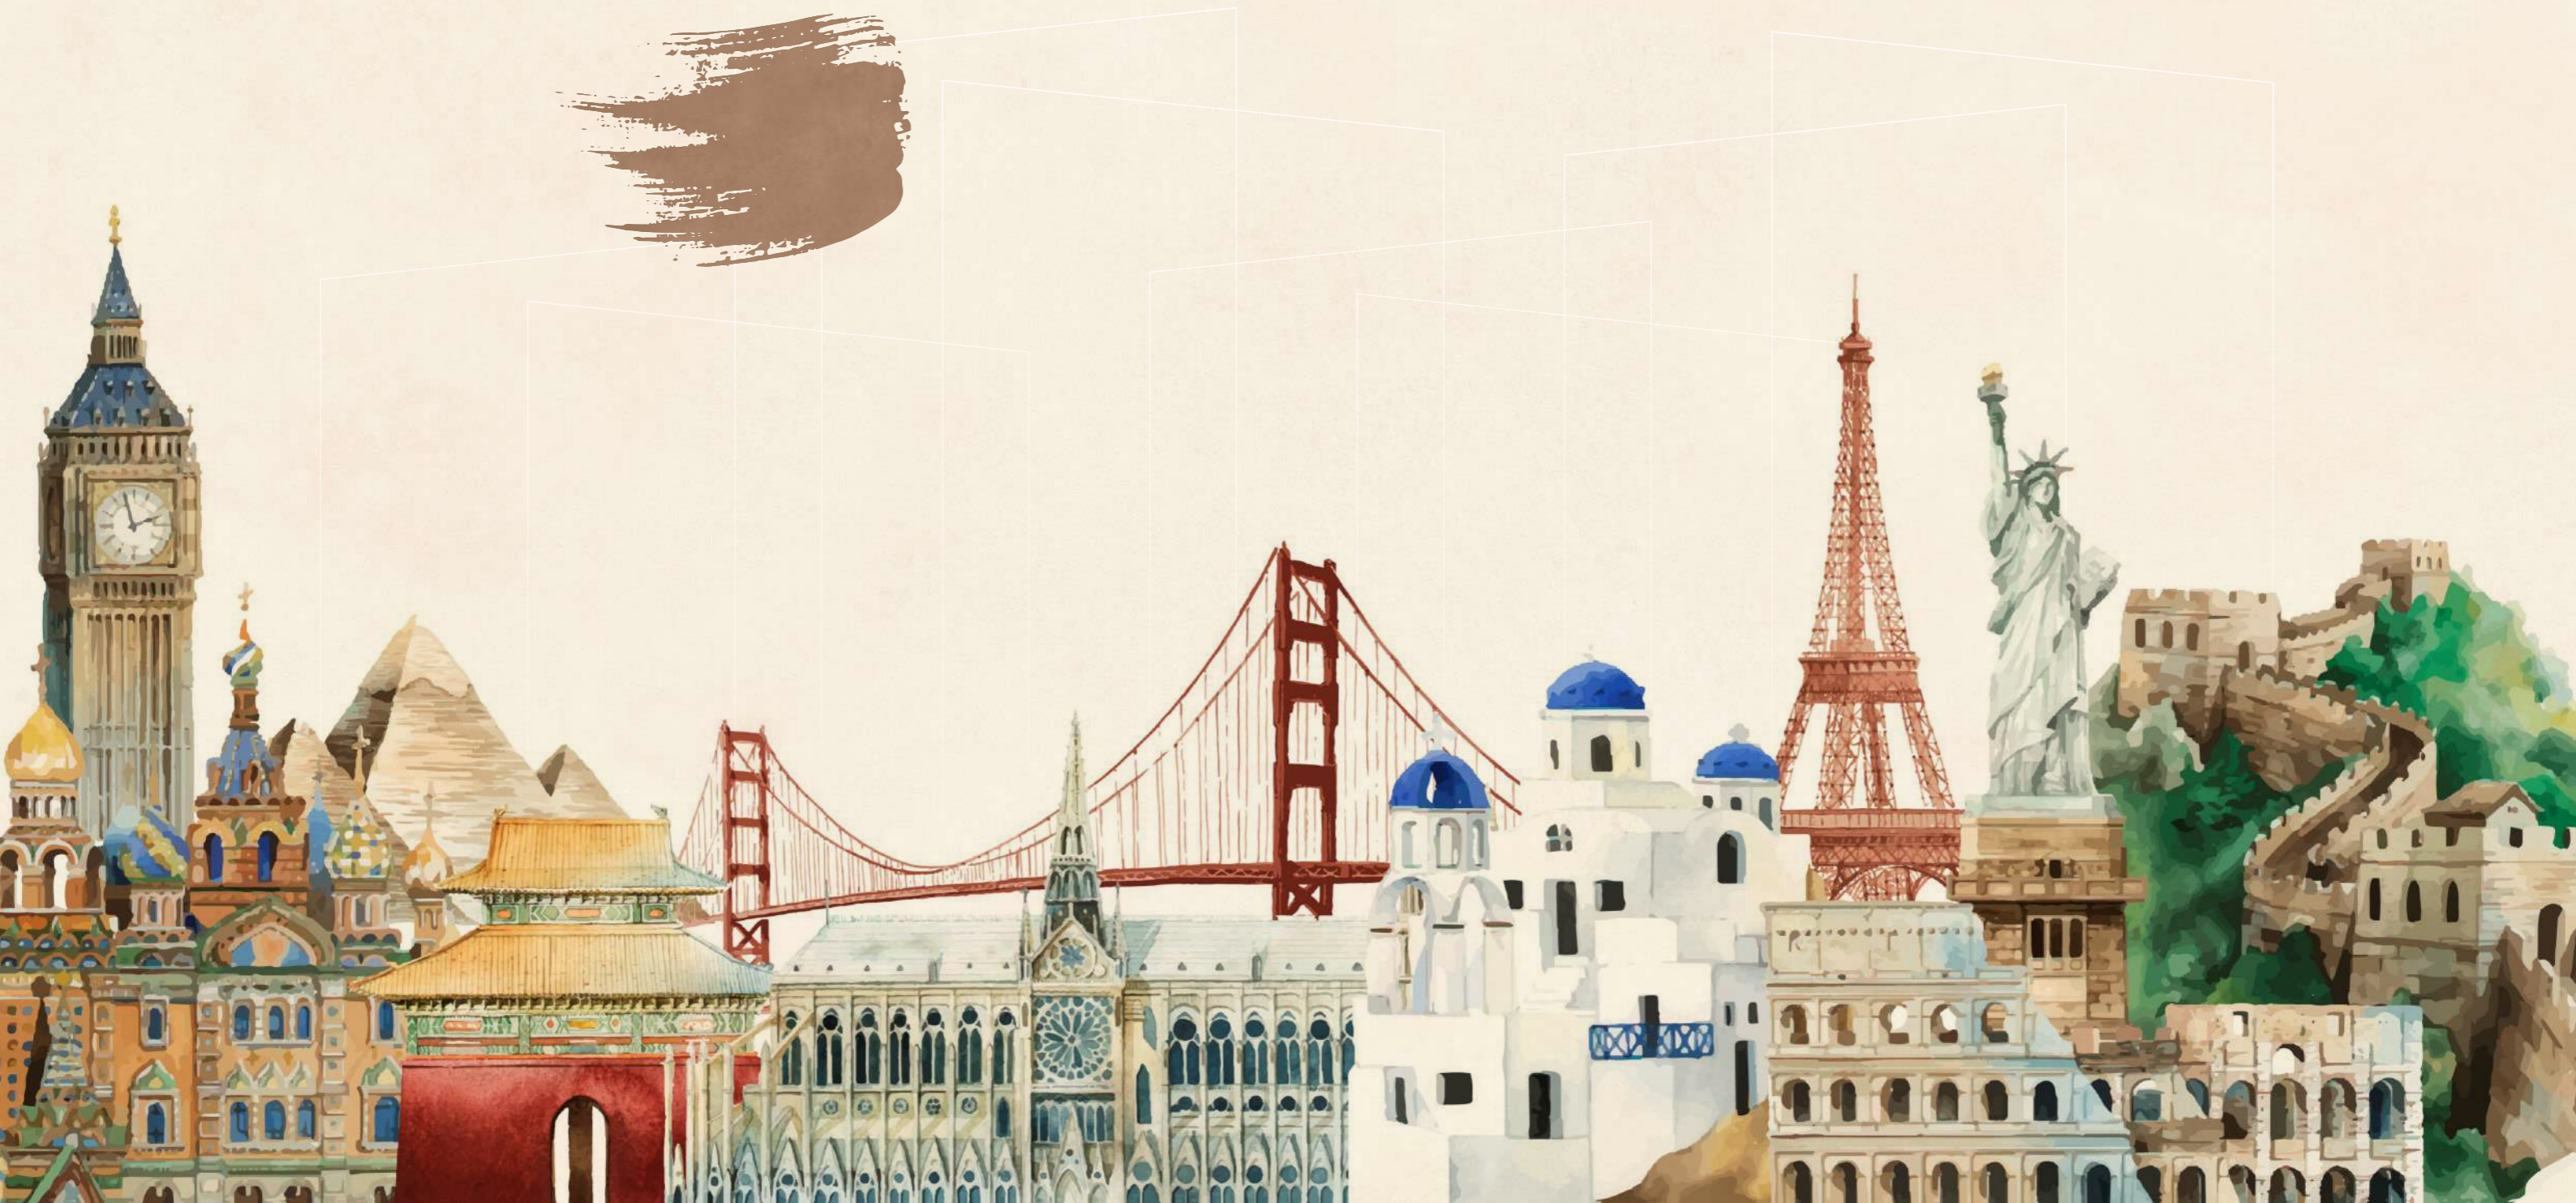



### Introducing Sky Color Tiles: Transform Your Space with Elegance and Style

Are you ready to elevate your home or office space to new heights of sophistication? Look no further than Sky Color Tiles! Our exquisite range of tiles is designed to bring a touch of the serene beauty of the sky into your interiors, creating an atmosphere of tranquility and luxury.




# PROPERTIES

Discover Elegance: Immerse yourself in a world of sophistication with our Double Charge Collection. Each tile is a masterpiece, meticulously crafted to redefine the concept of elegance.



**High durable**




**Acid resistance**



**Stain resistance**



**Easy to clean**




**Dimensional stability**



**Slip resistance**



**Eco friendly**



**Maintenance free**



Sky Aqua



Sky Cobalt



Sky Bianco



Sky Cider



Sky Arctic



Sky Ivory



Sky Pink



Sky Oat



Sky Olive



Sky Red



Sky Tangerine



Sky Gray



**SKY AQUA**



FINISH  
**MATT**

SIZE  
**600X1200MM**

THICKNESS  
**8.5MM**






**SKY ARCTIC**



FINISH  
**MATT**

SIZE  
**600X1200MM**

THICKNESS  
**8.5MM**

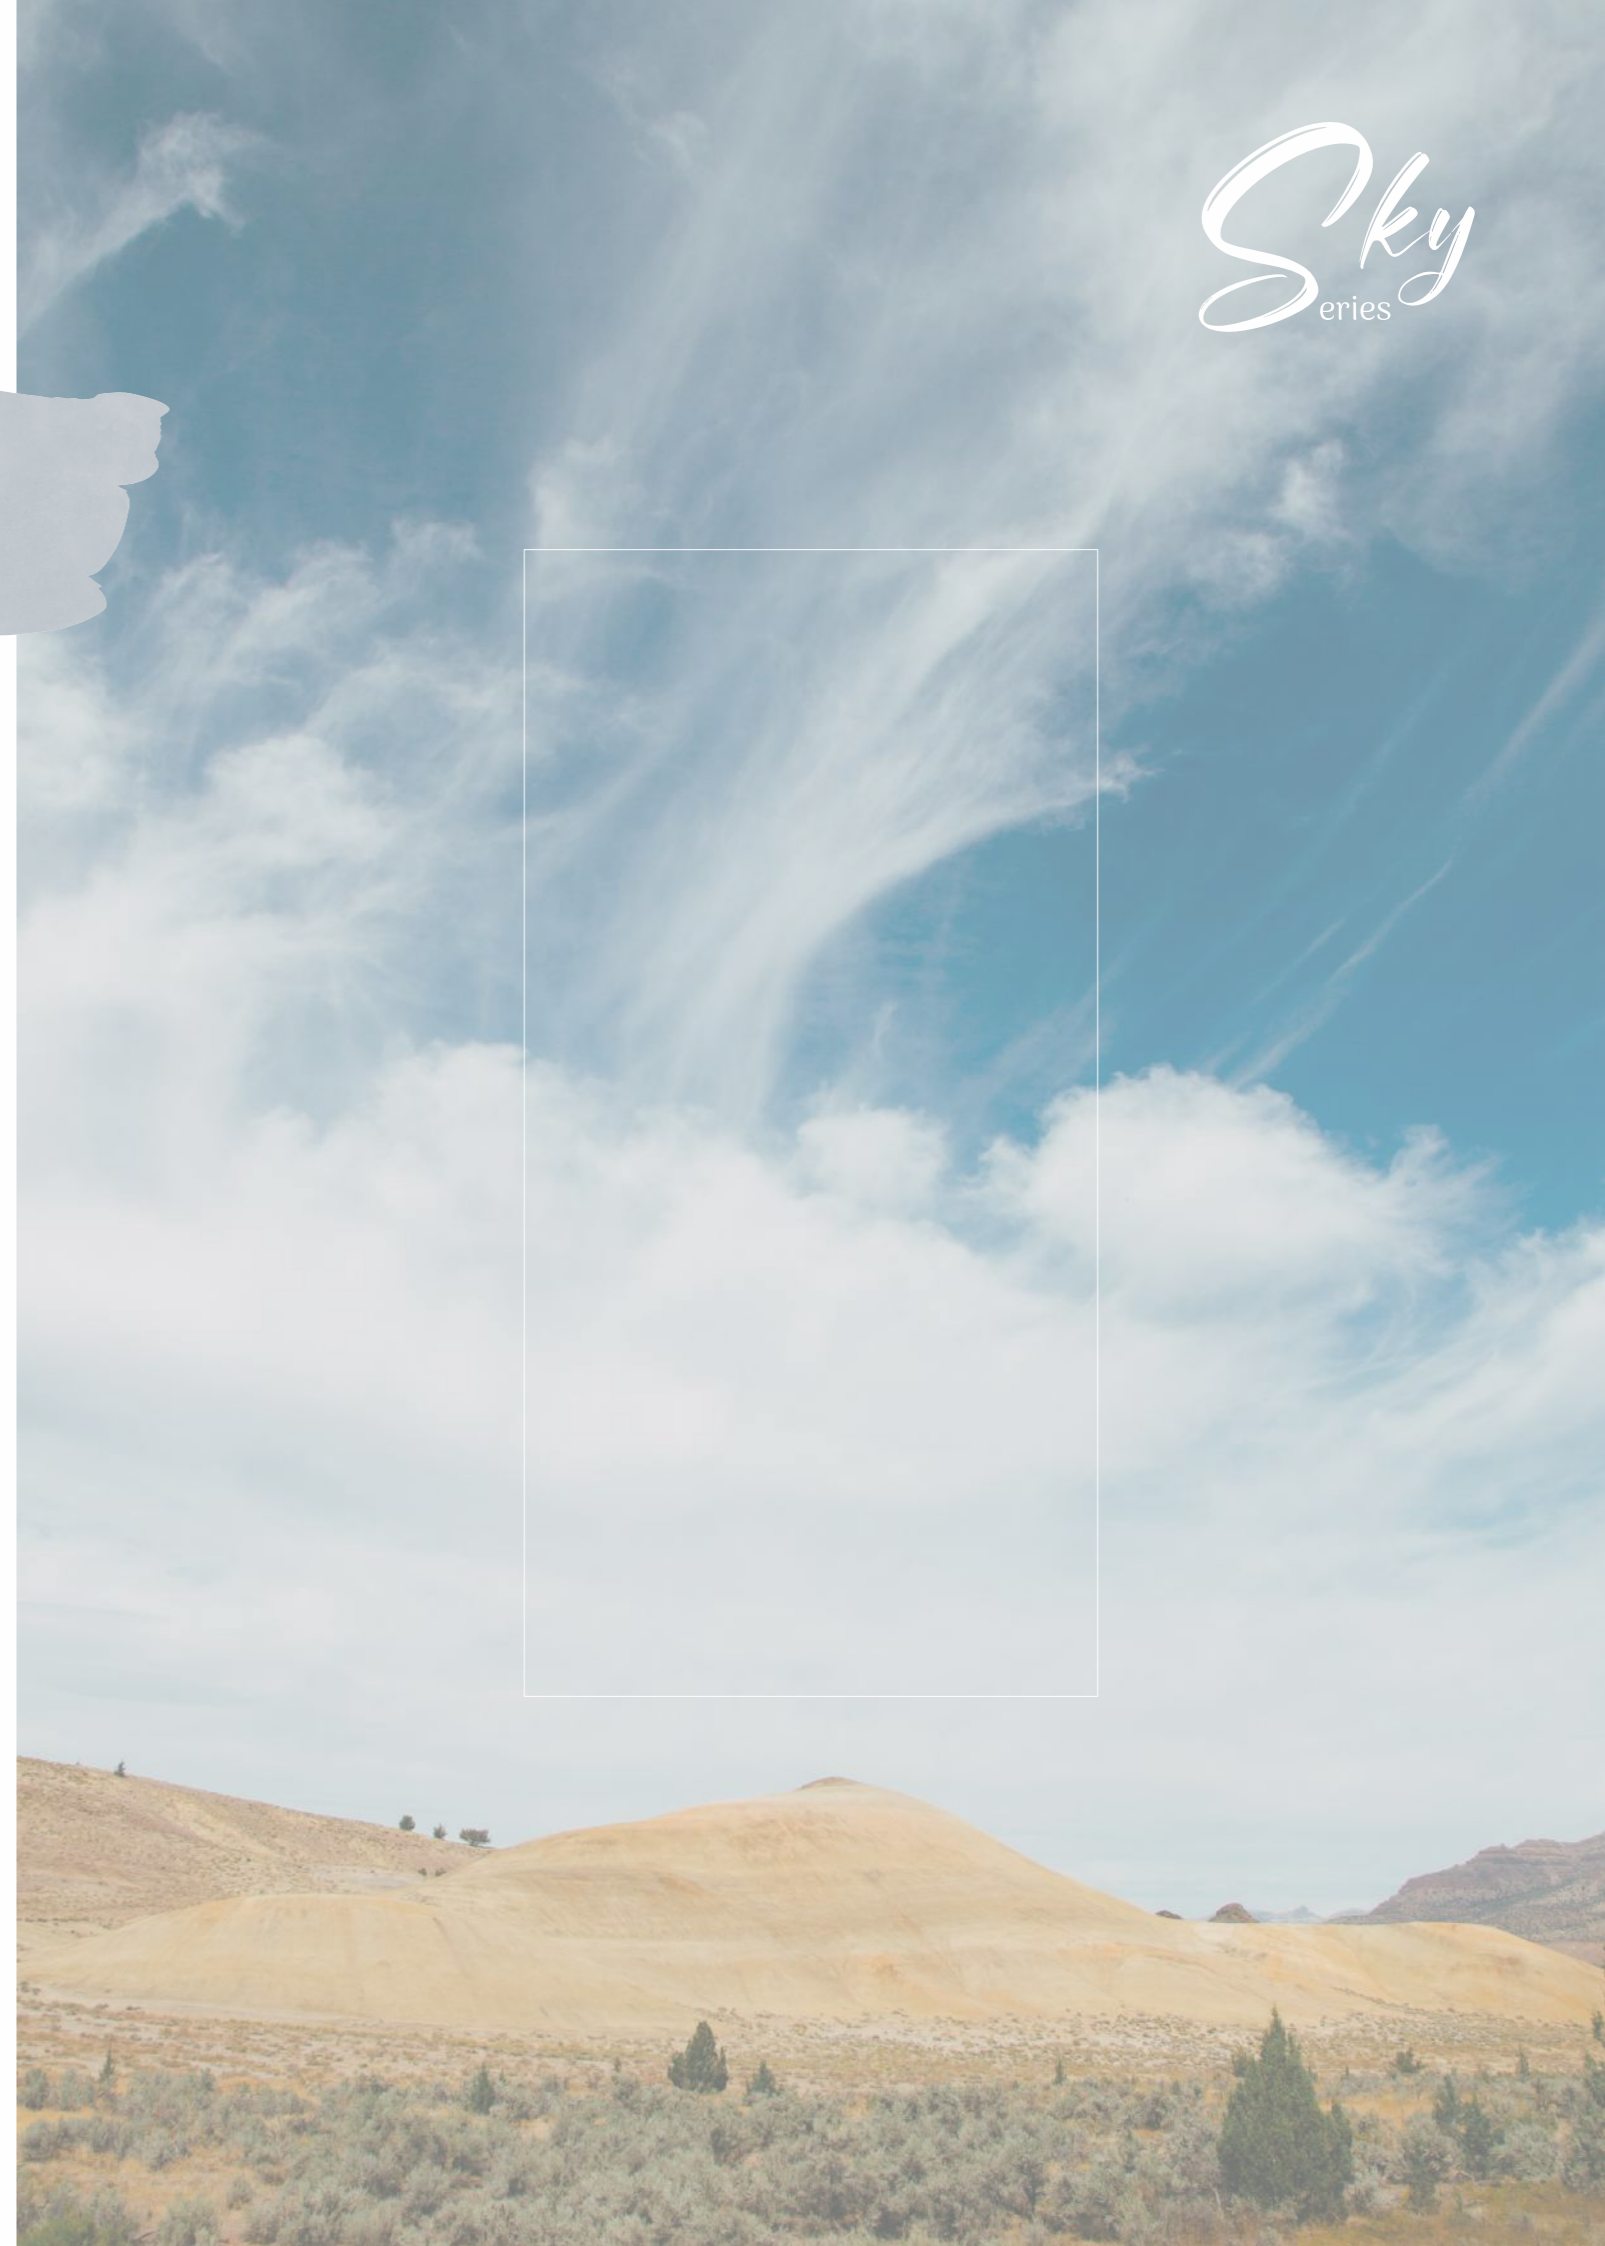







**SKY BIANCO**



FINISH  
**MATT**

SIZE  
**600X1200MM**

THICKNESS  
**8.5MM**

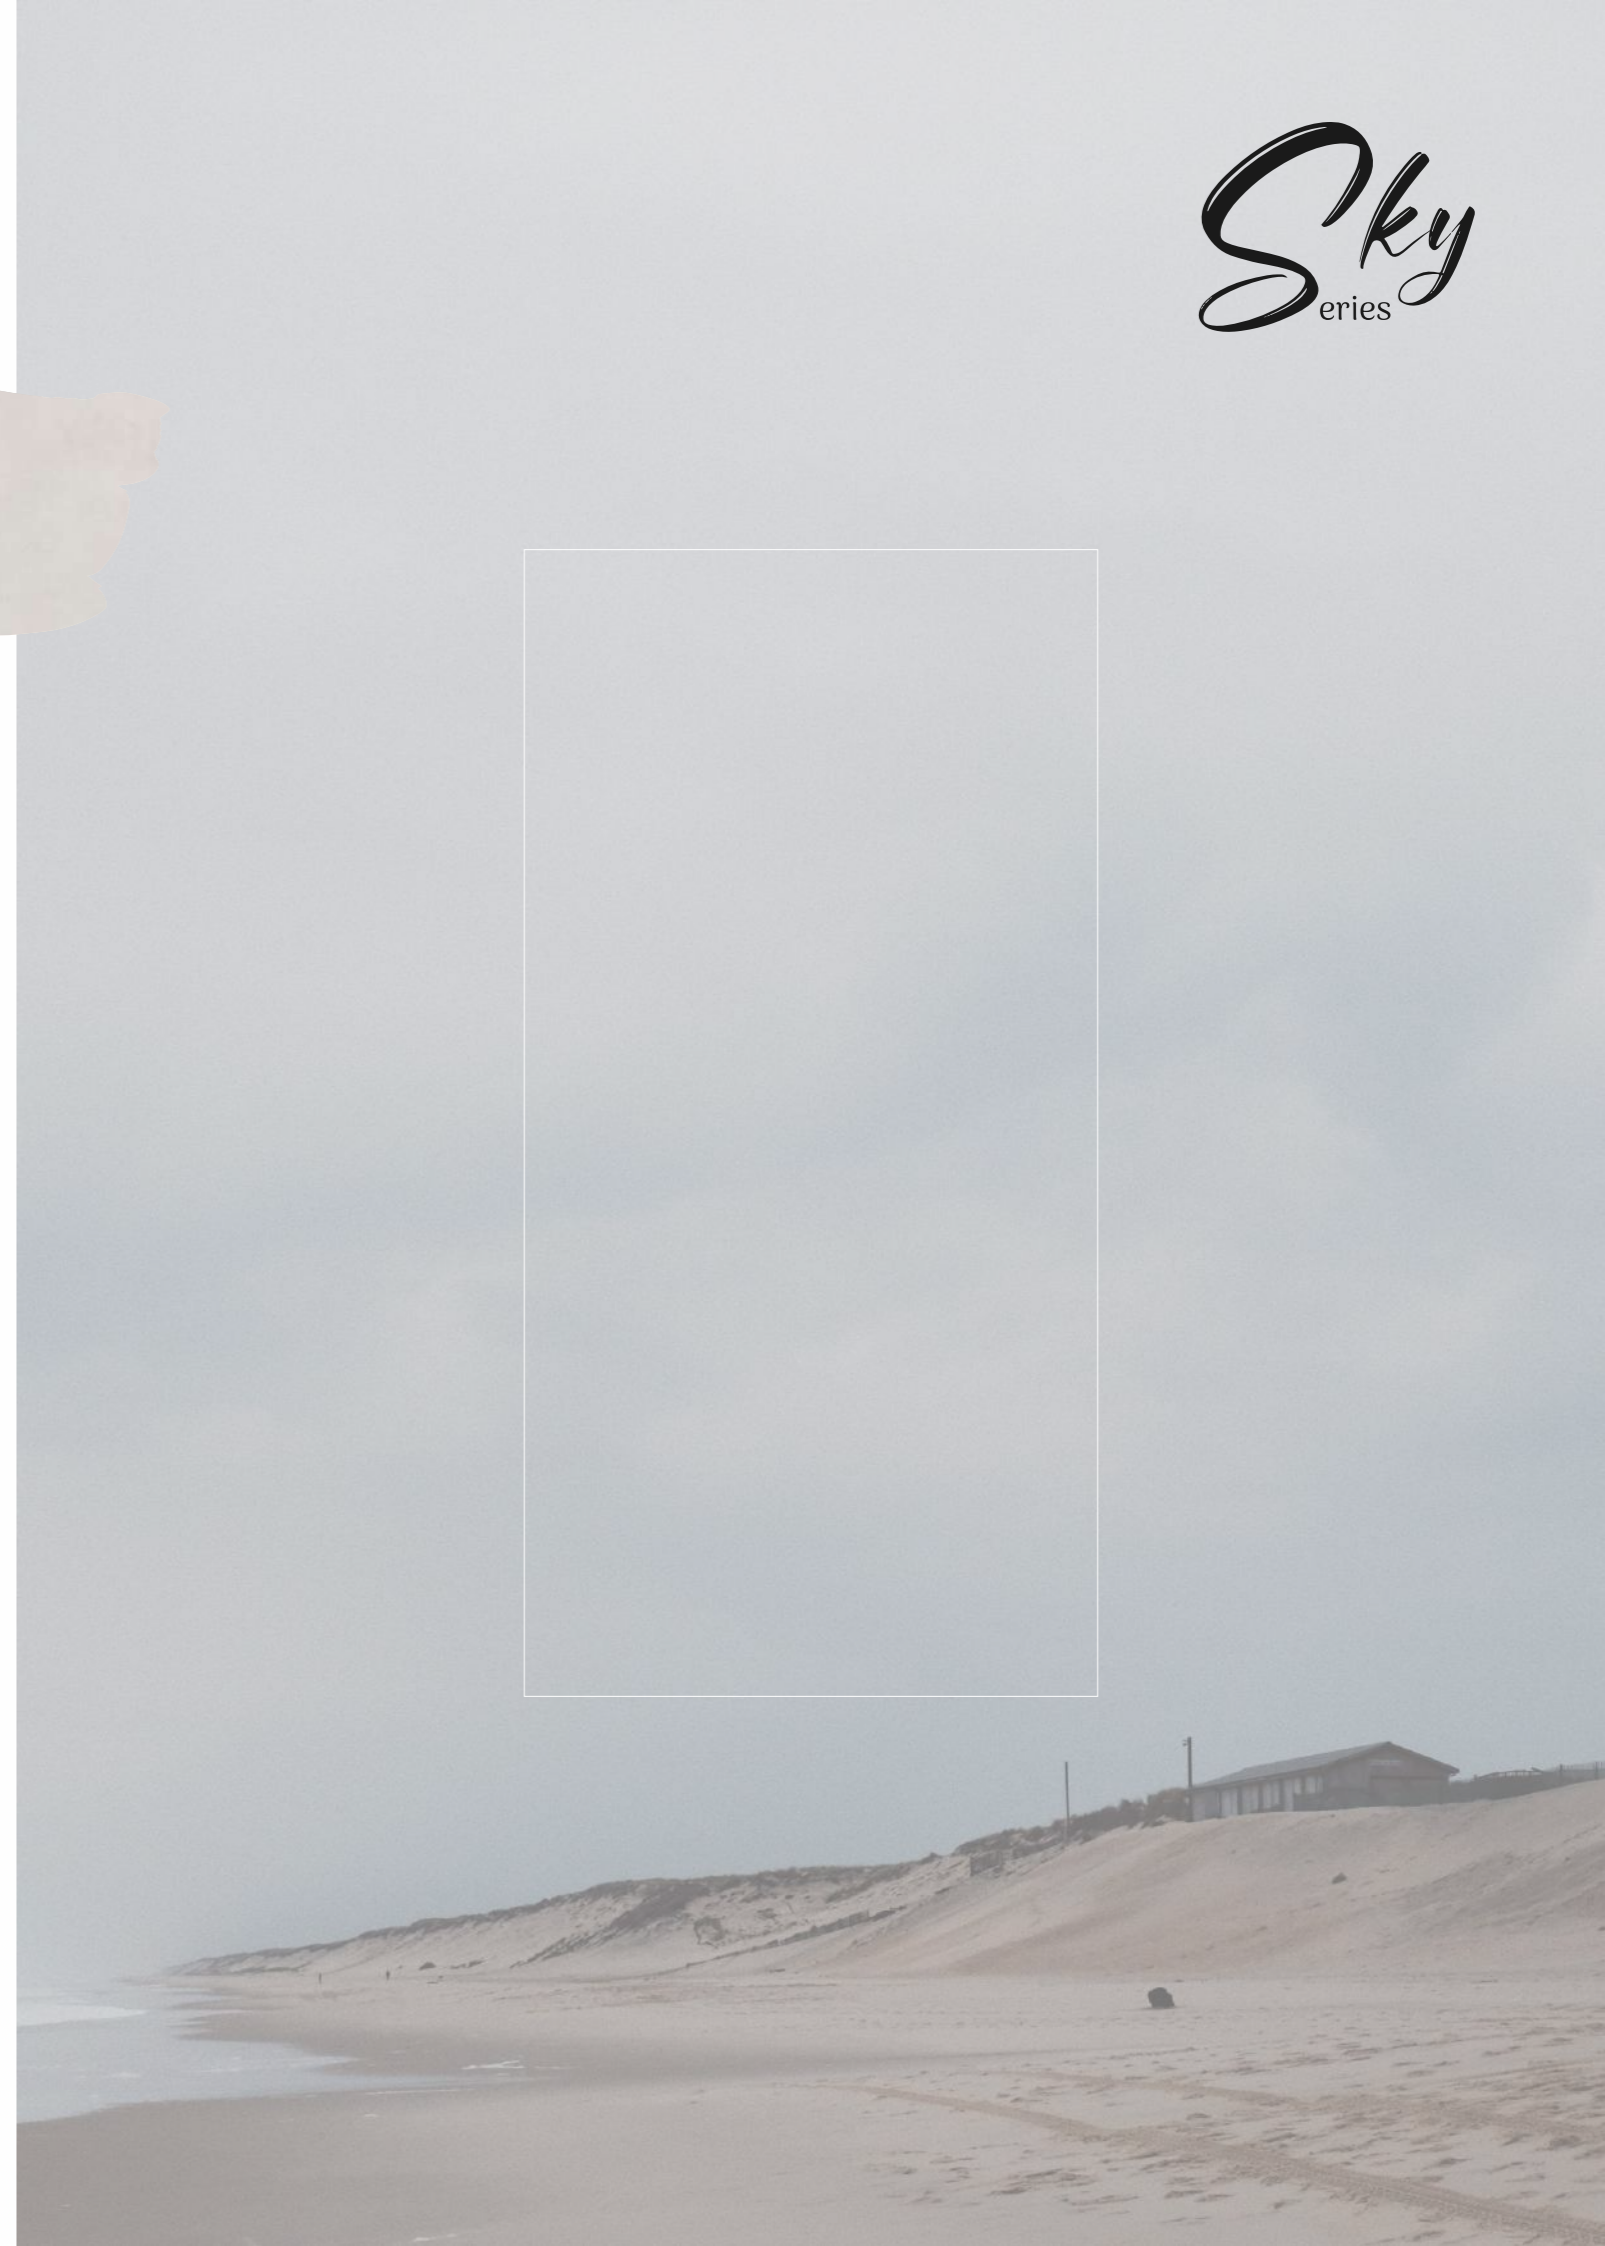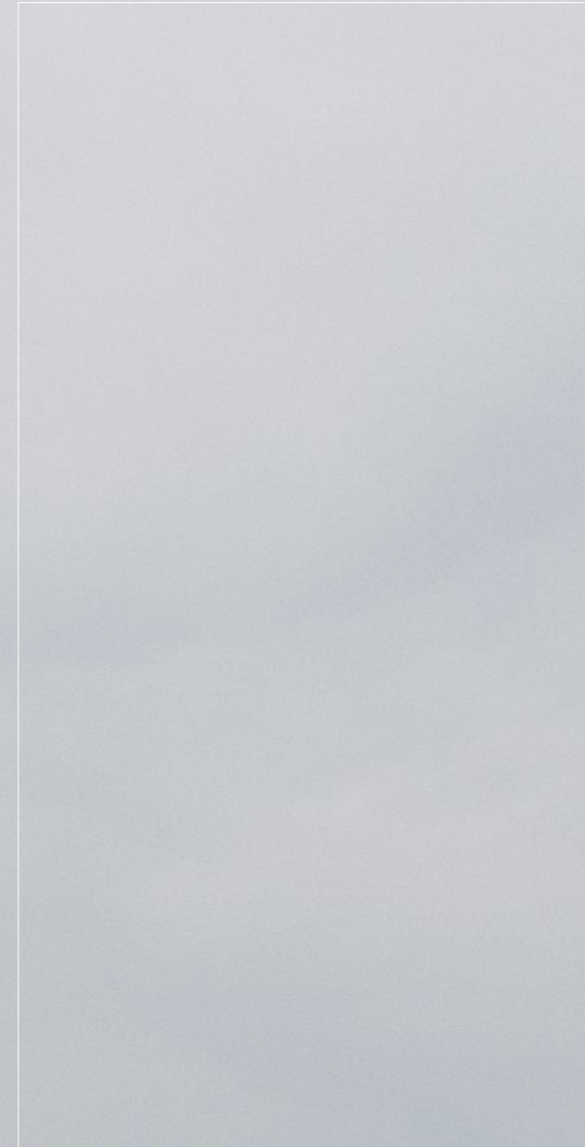




**SKY CIDER**



FINISH  
**MATT**

SIZE  
**600X1200MM**

THICKNESS  
**8.5MM**

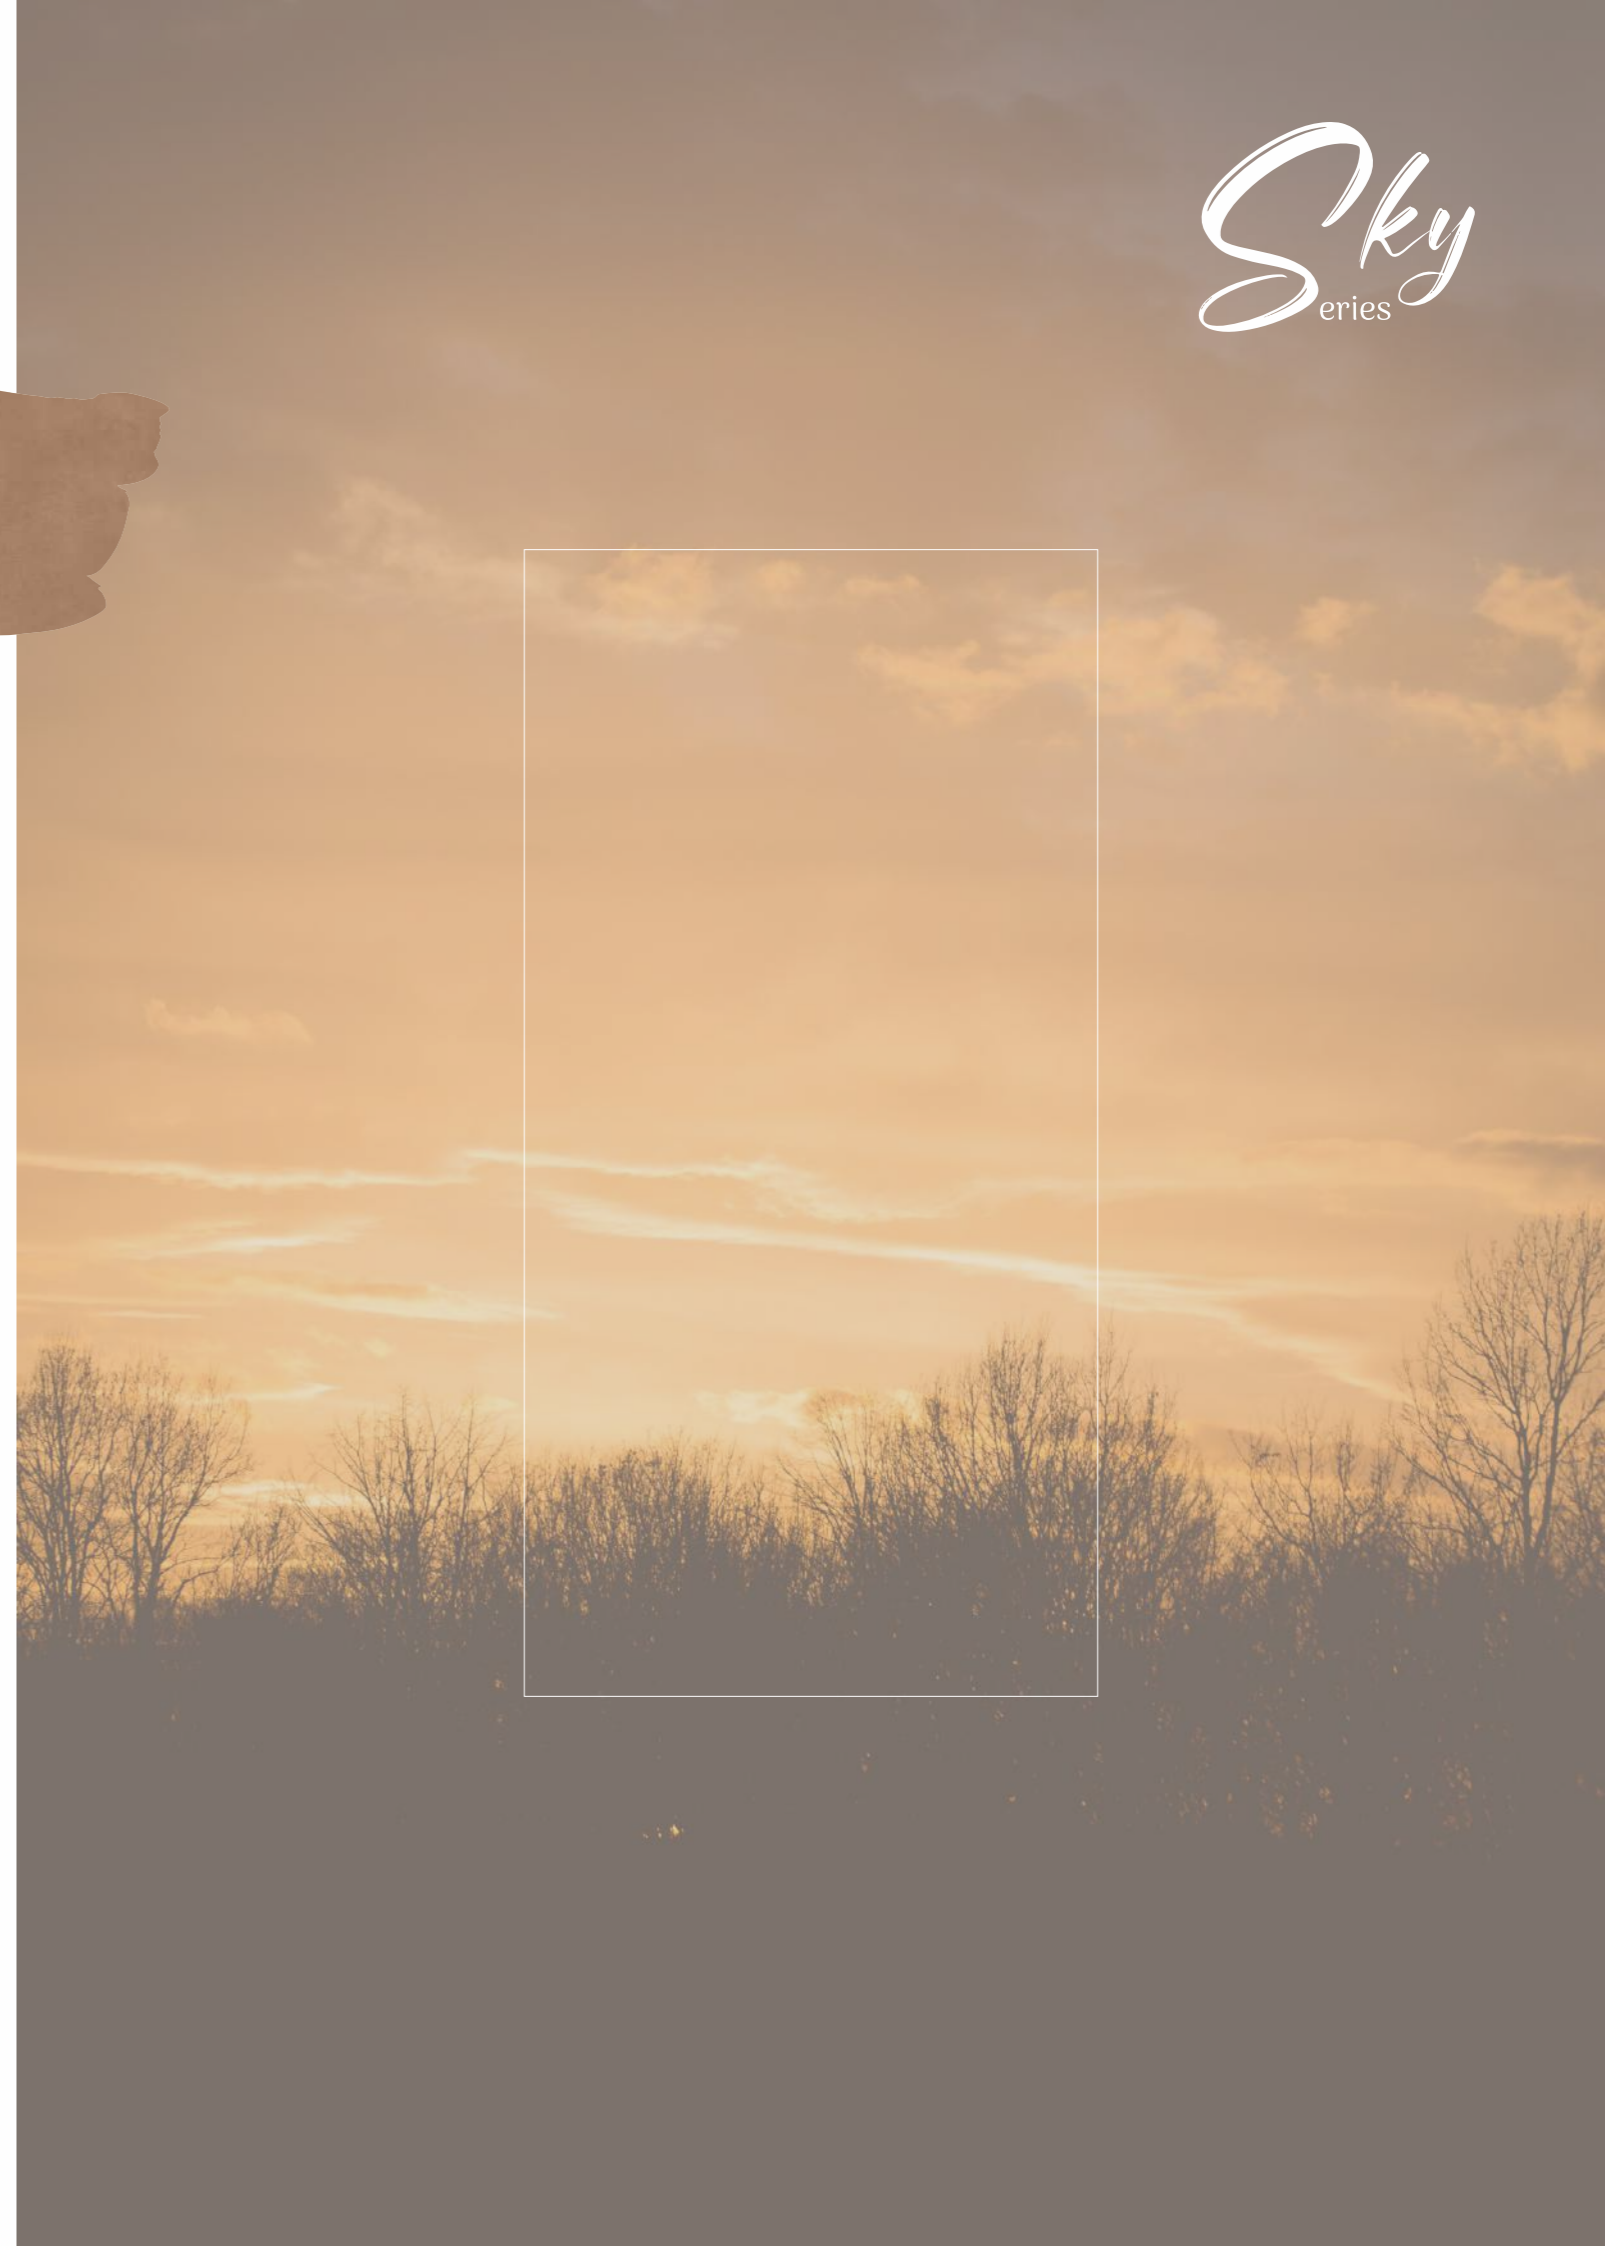




**SKY COBALT**



FINISH  
**MATT**


SIZE  
**600X1200MM**

THICKNESS  
**8.5MM**

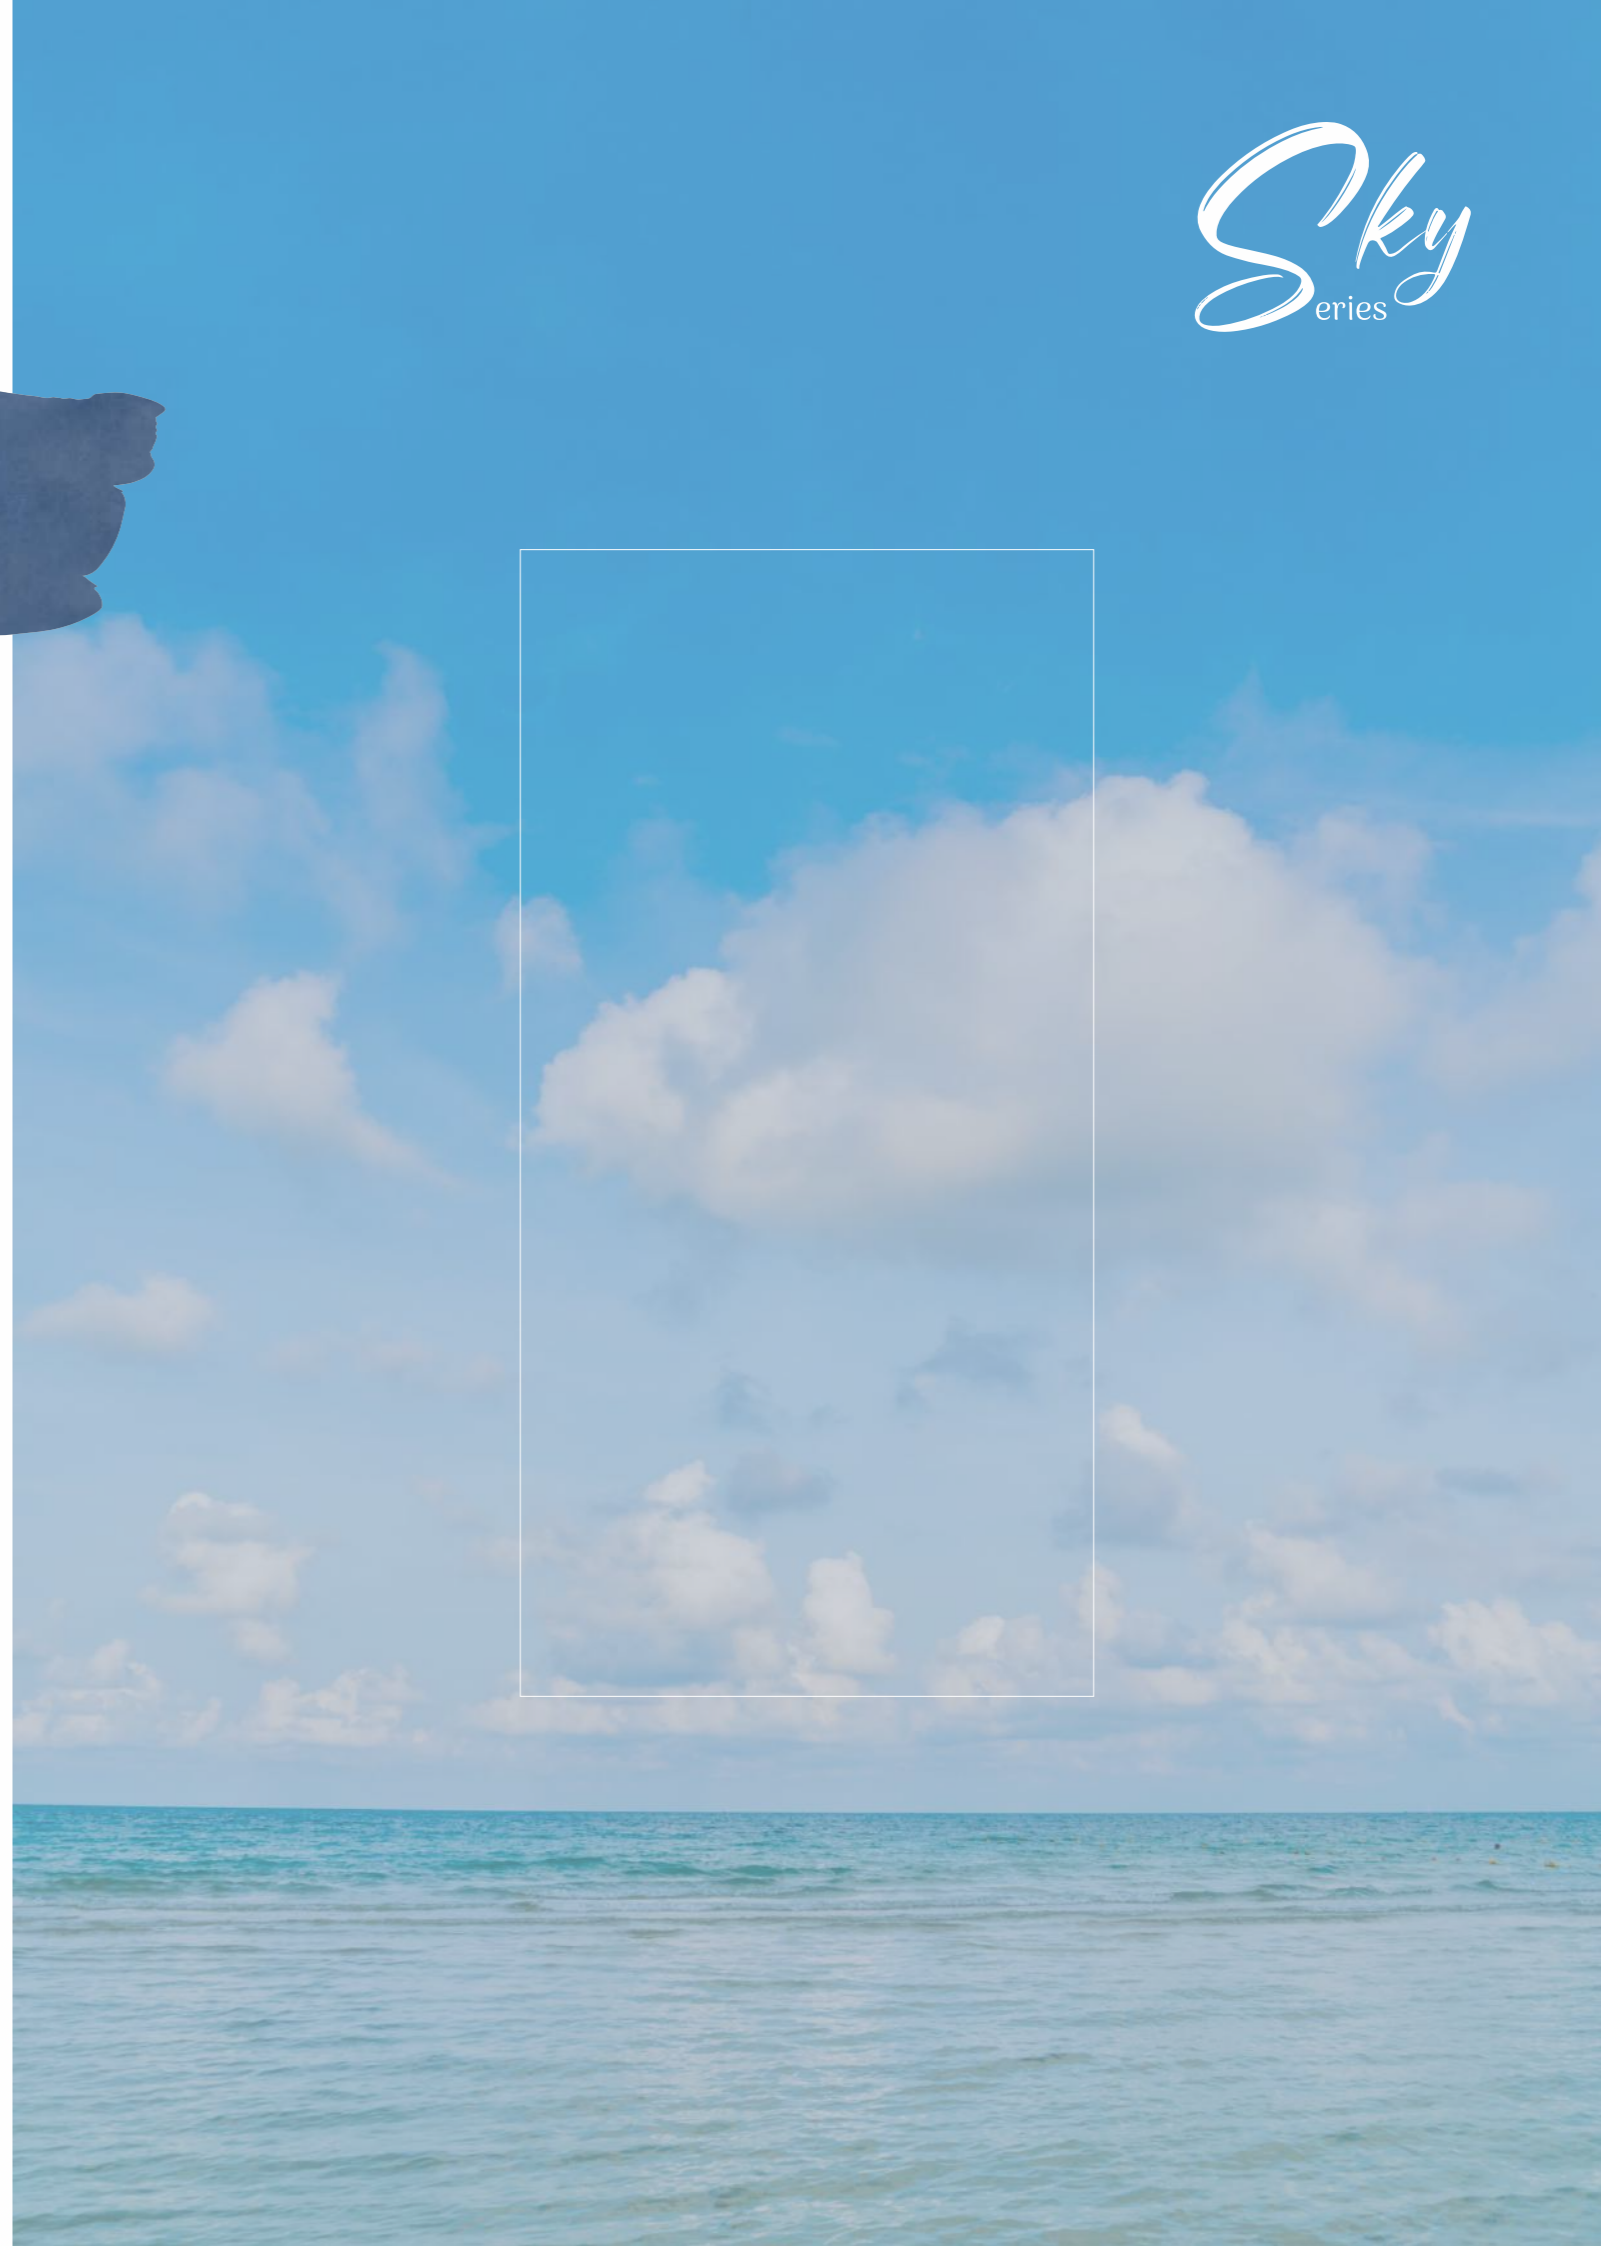




**SKY IVORY**

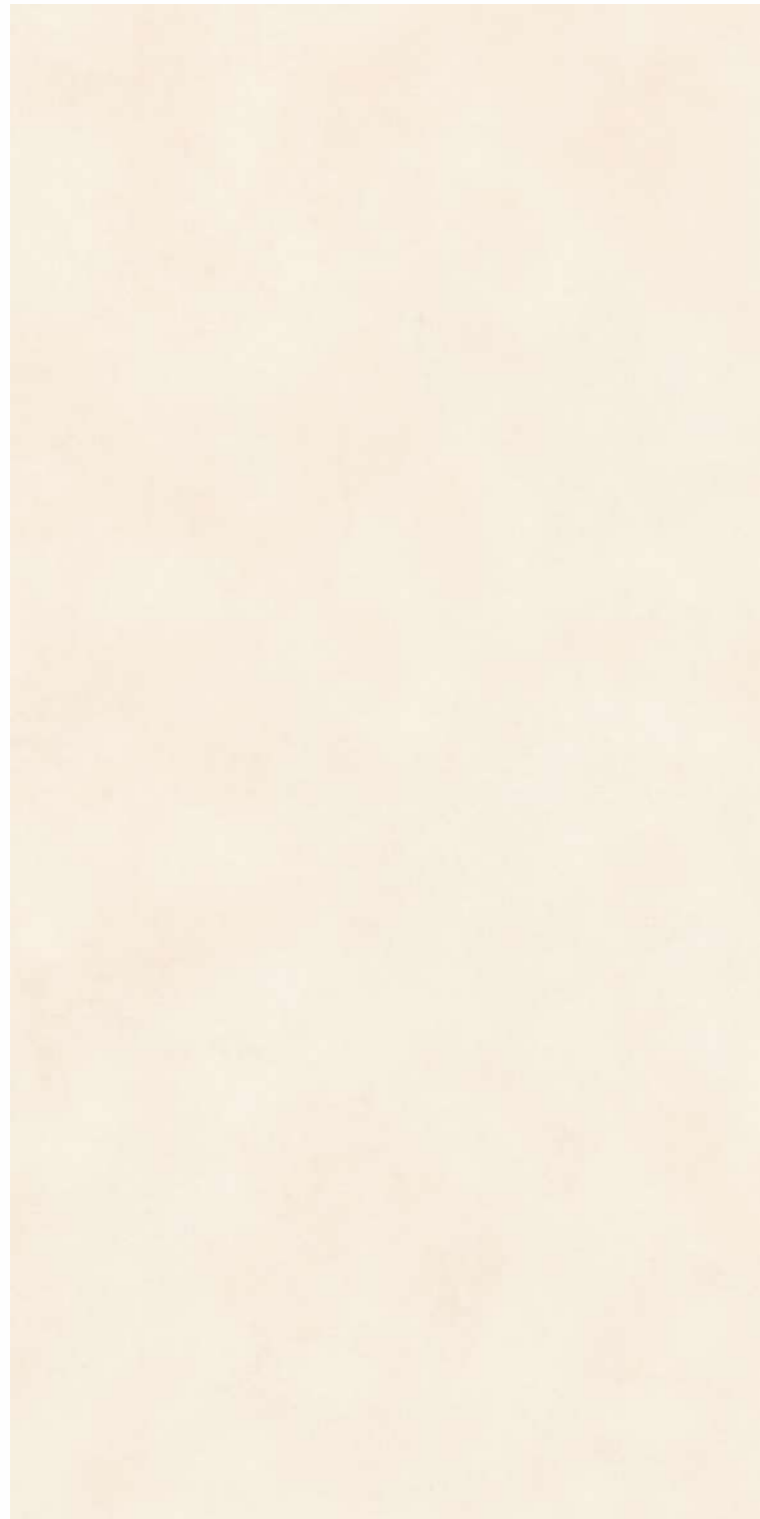

FINISH  
**MATT**

SIZE  
**600X1200MM**

THICKNESS  
**8.5MM**

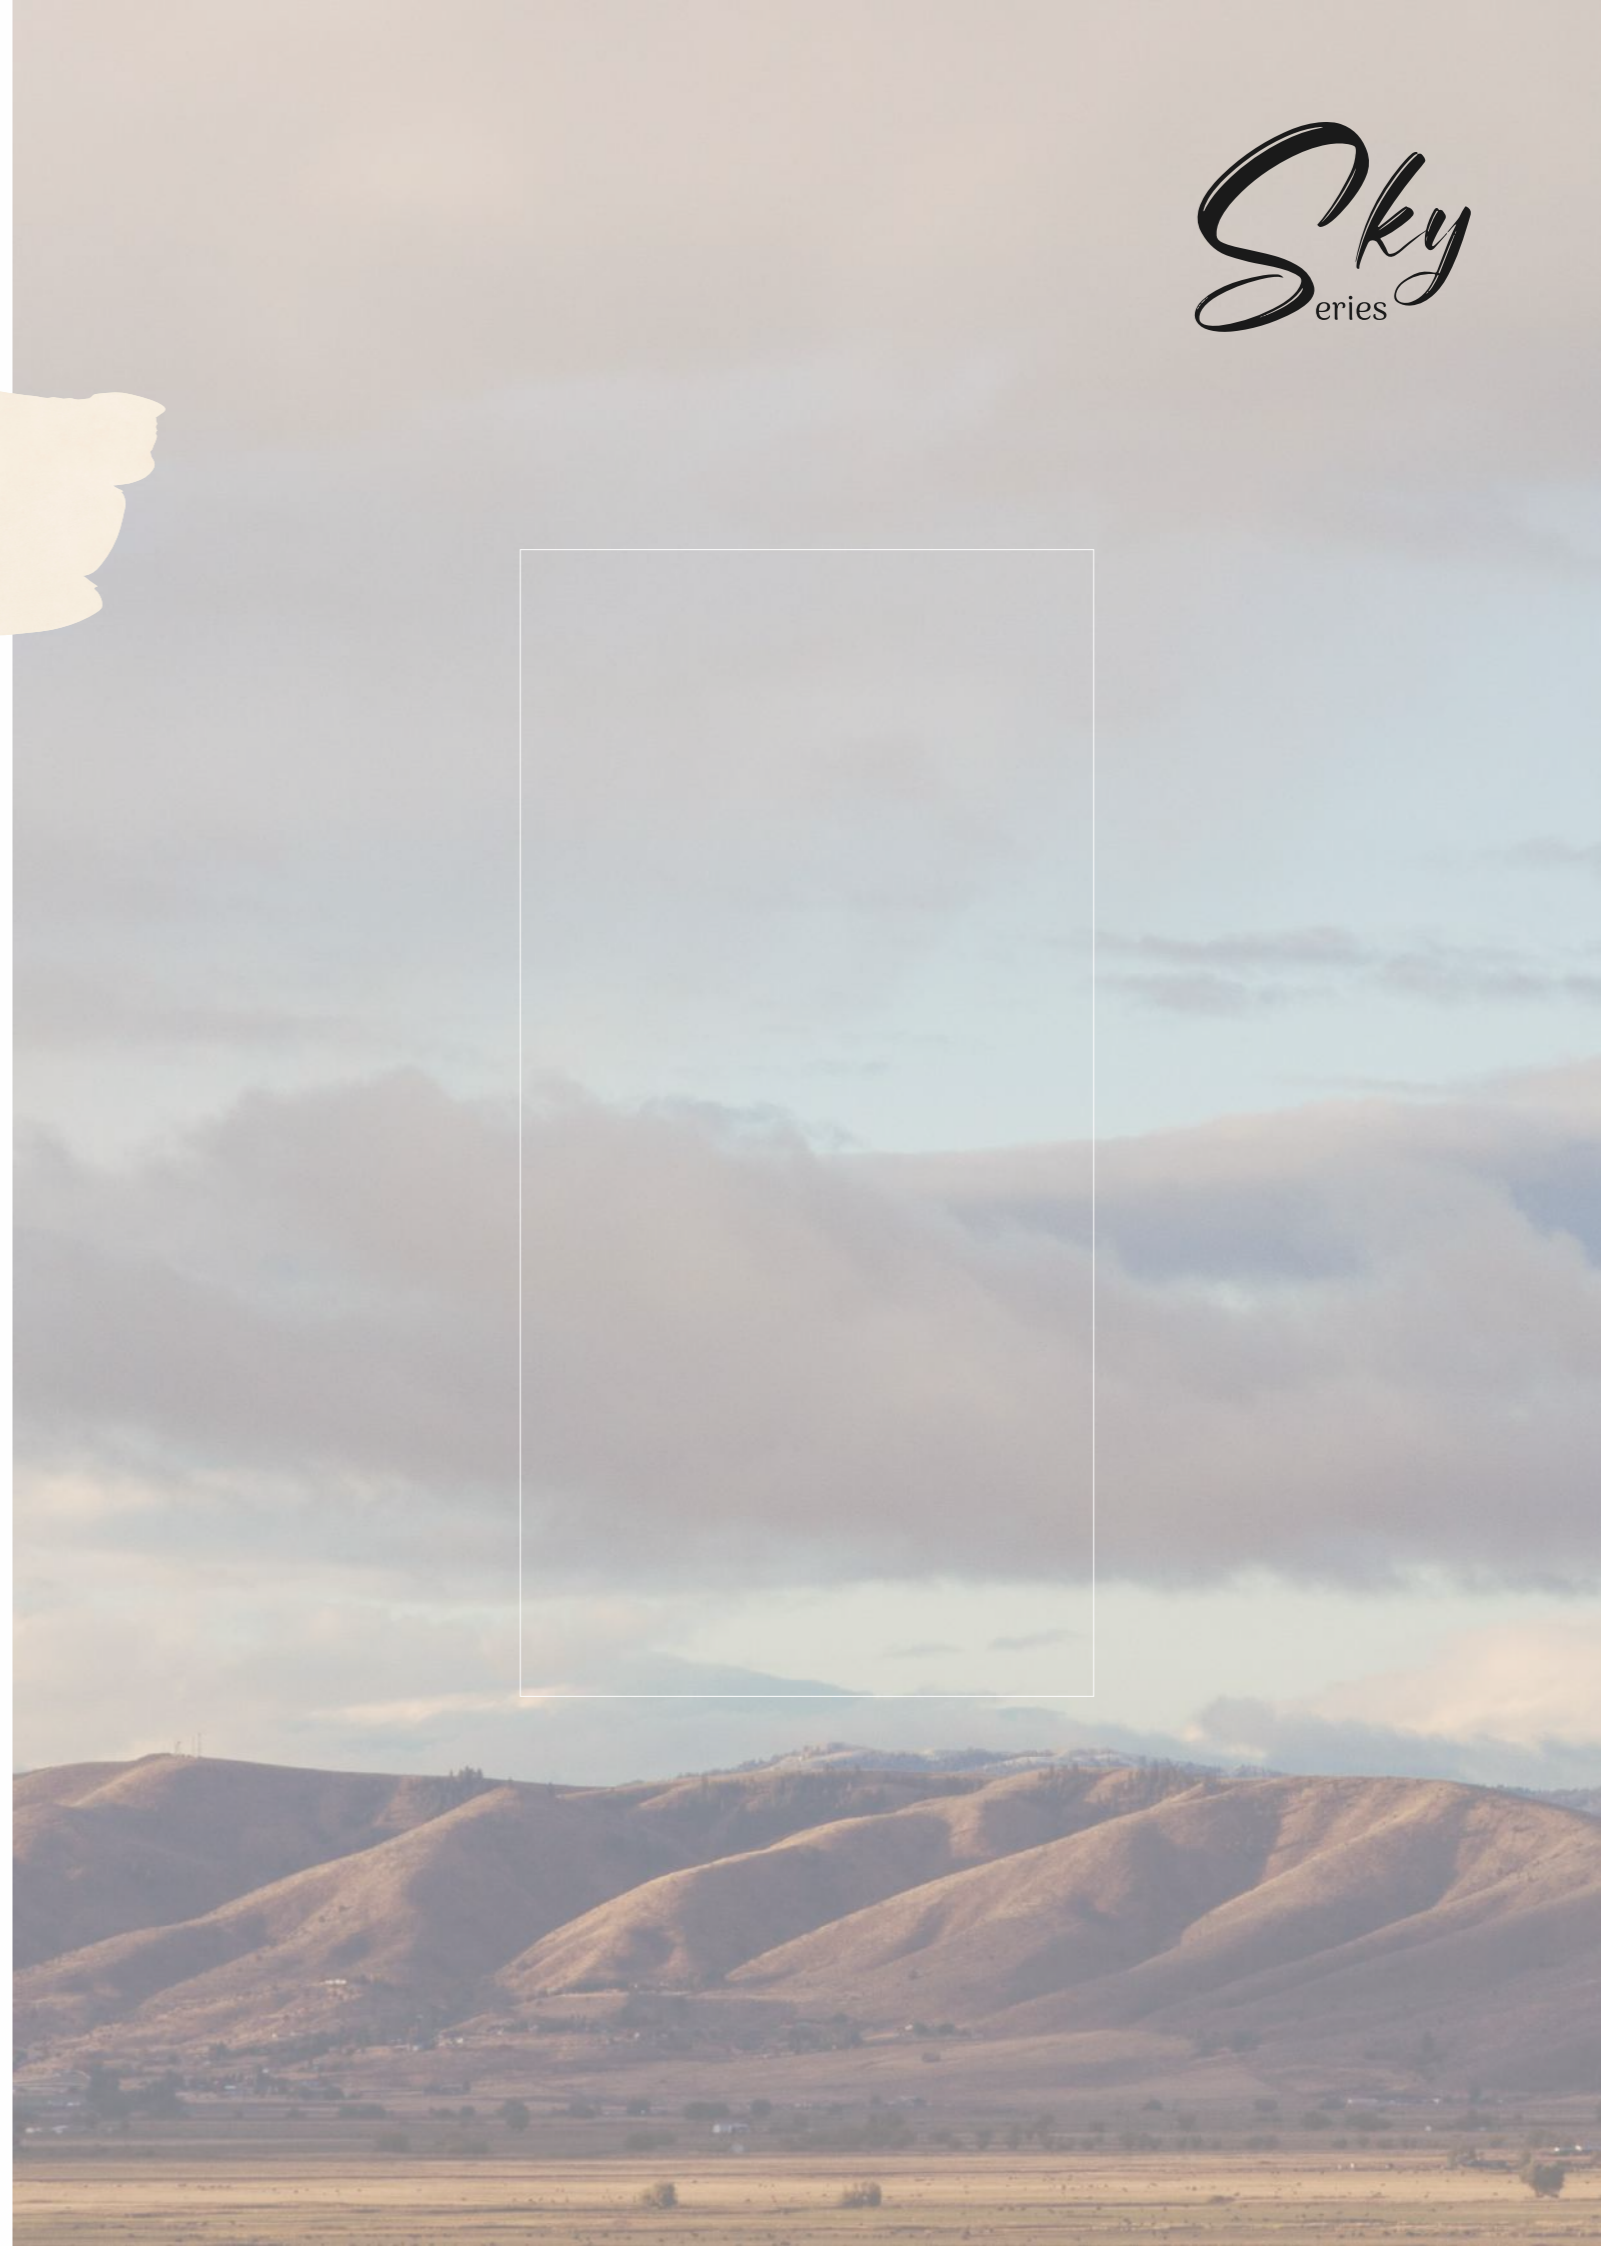





**SKY OAT**



FINISH  
**MATT**

SIZE  
**600X1200MM**

THICKNESS  
**8.5MM**





**GruppoNueva™**

**SKY OLIVE**




FINISH  
**MATT**

SIZE  
**600X1200MM**


THICKNESS  
**8.5MM**

*Sky*  
eries

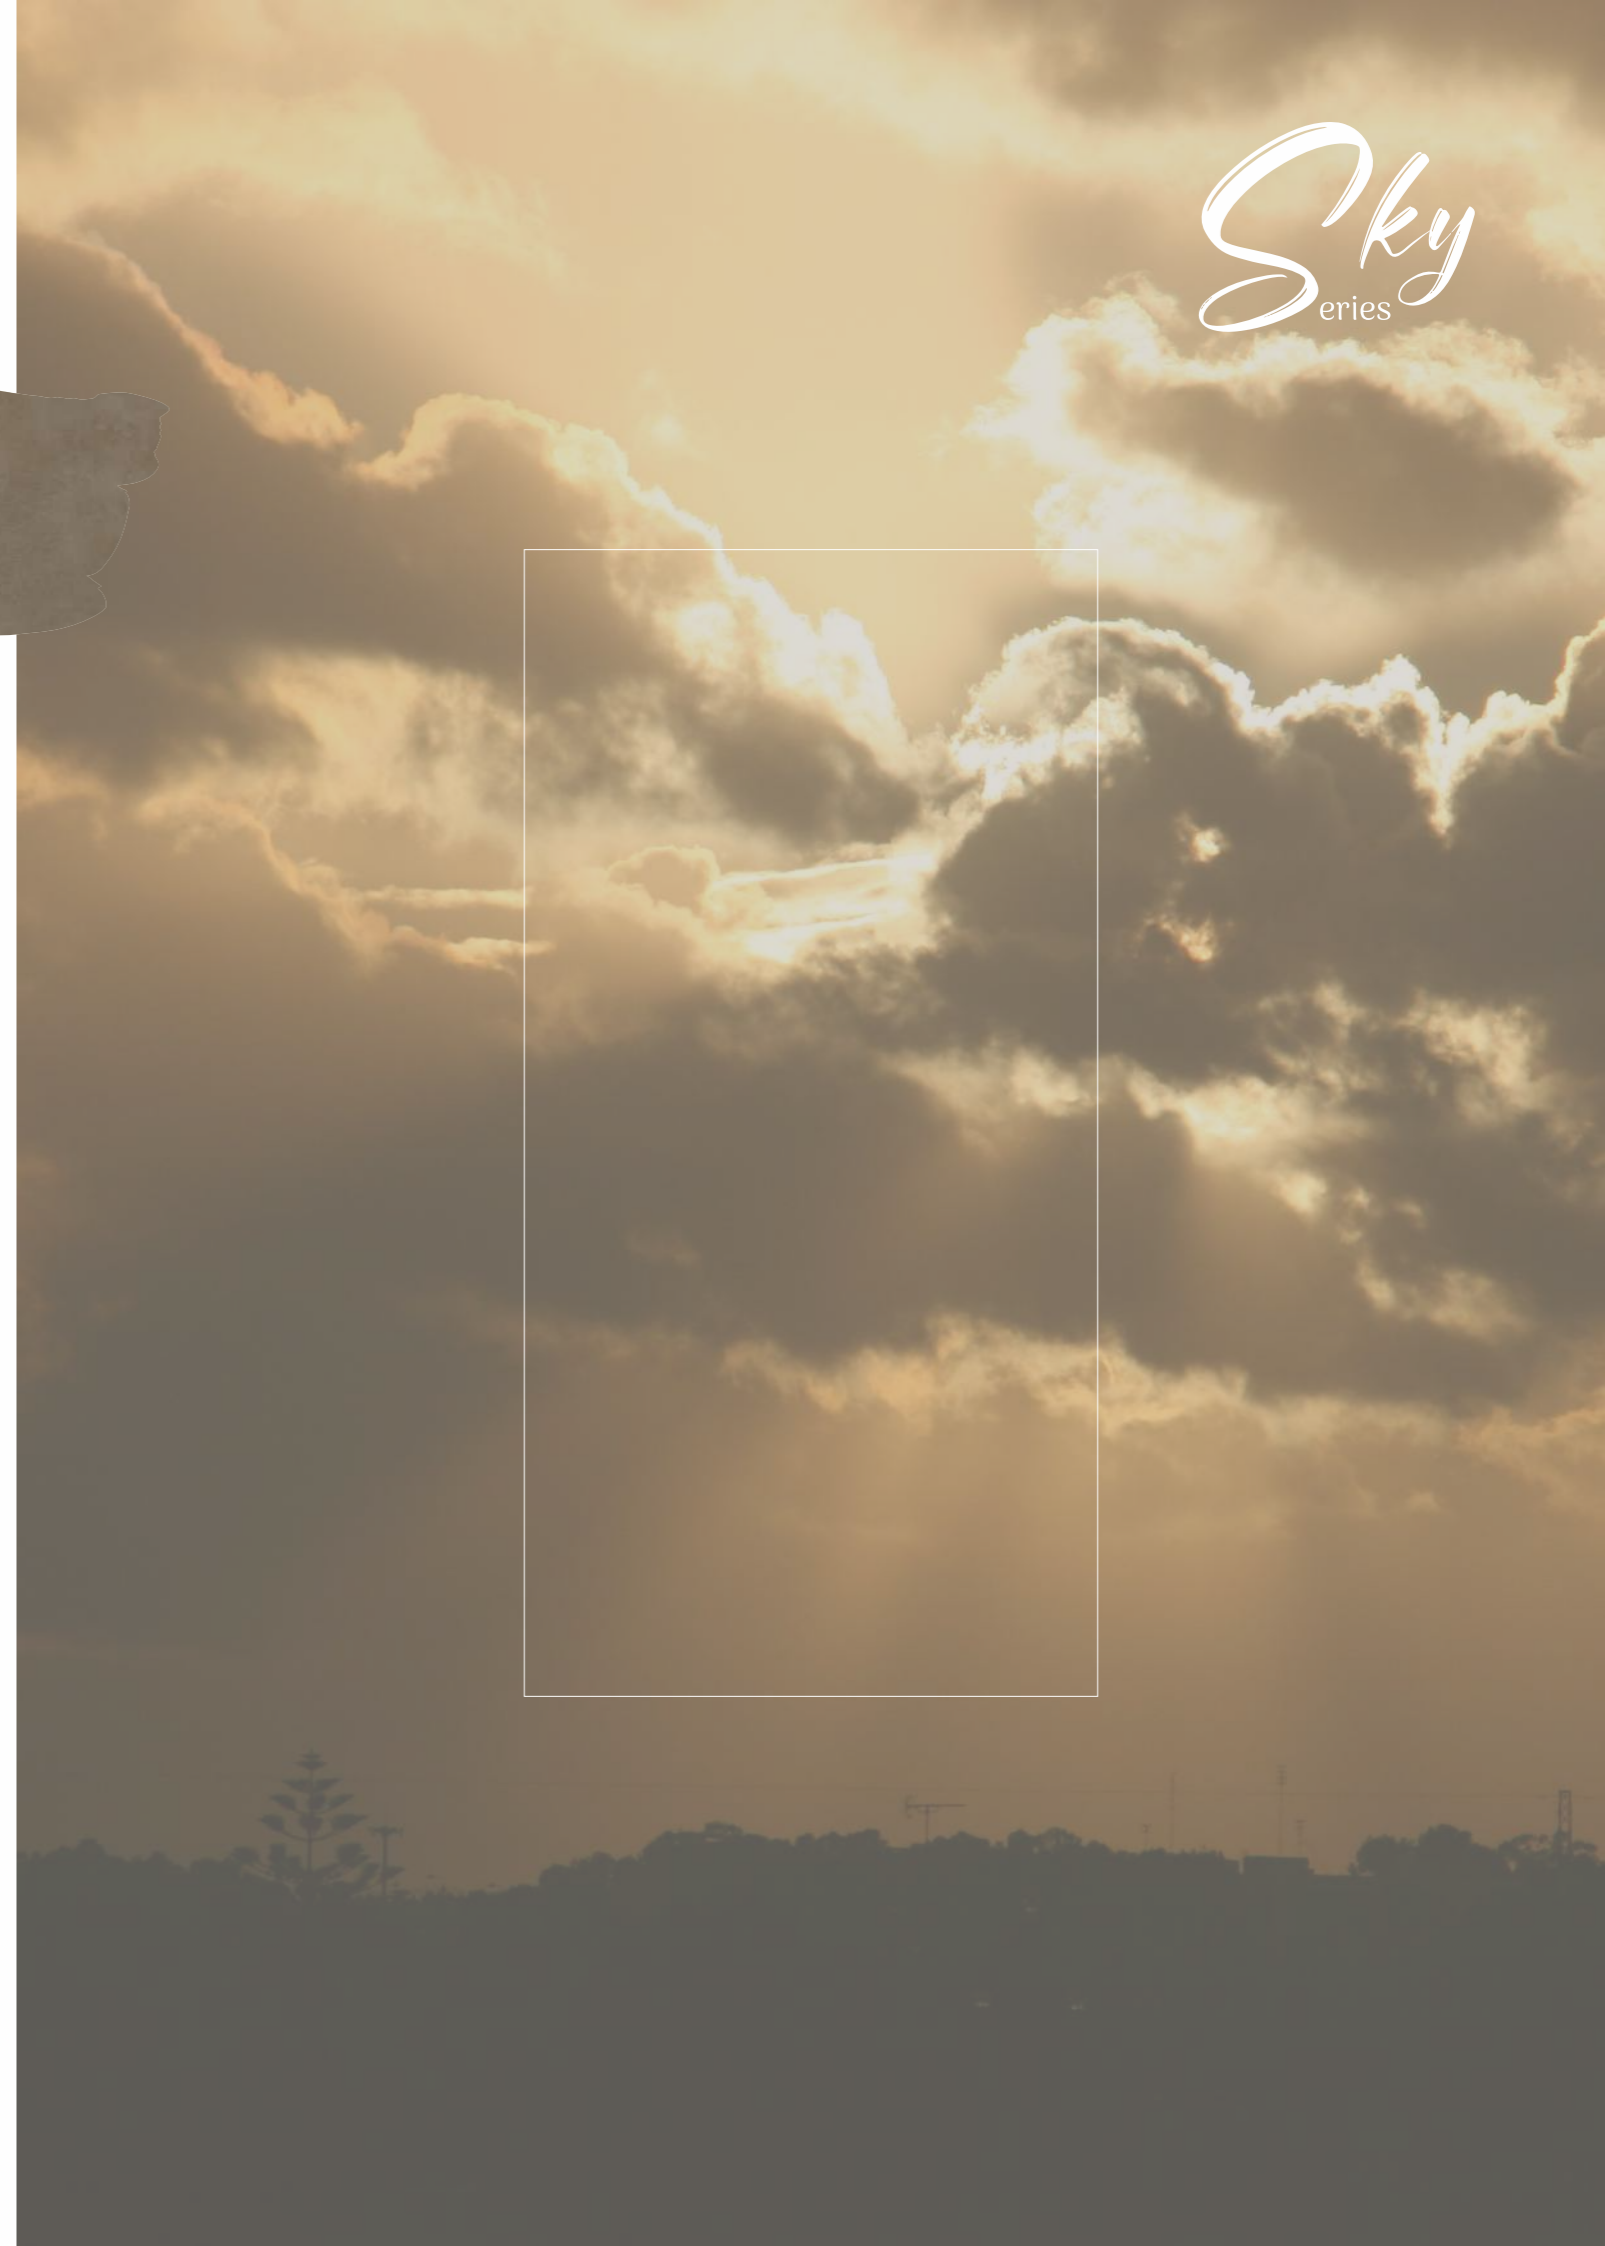



**SKY PINK**

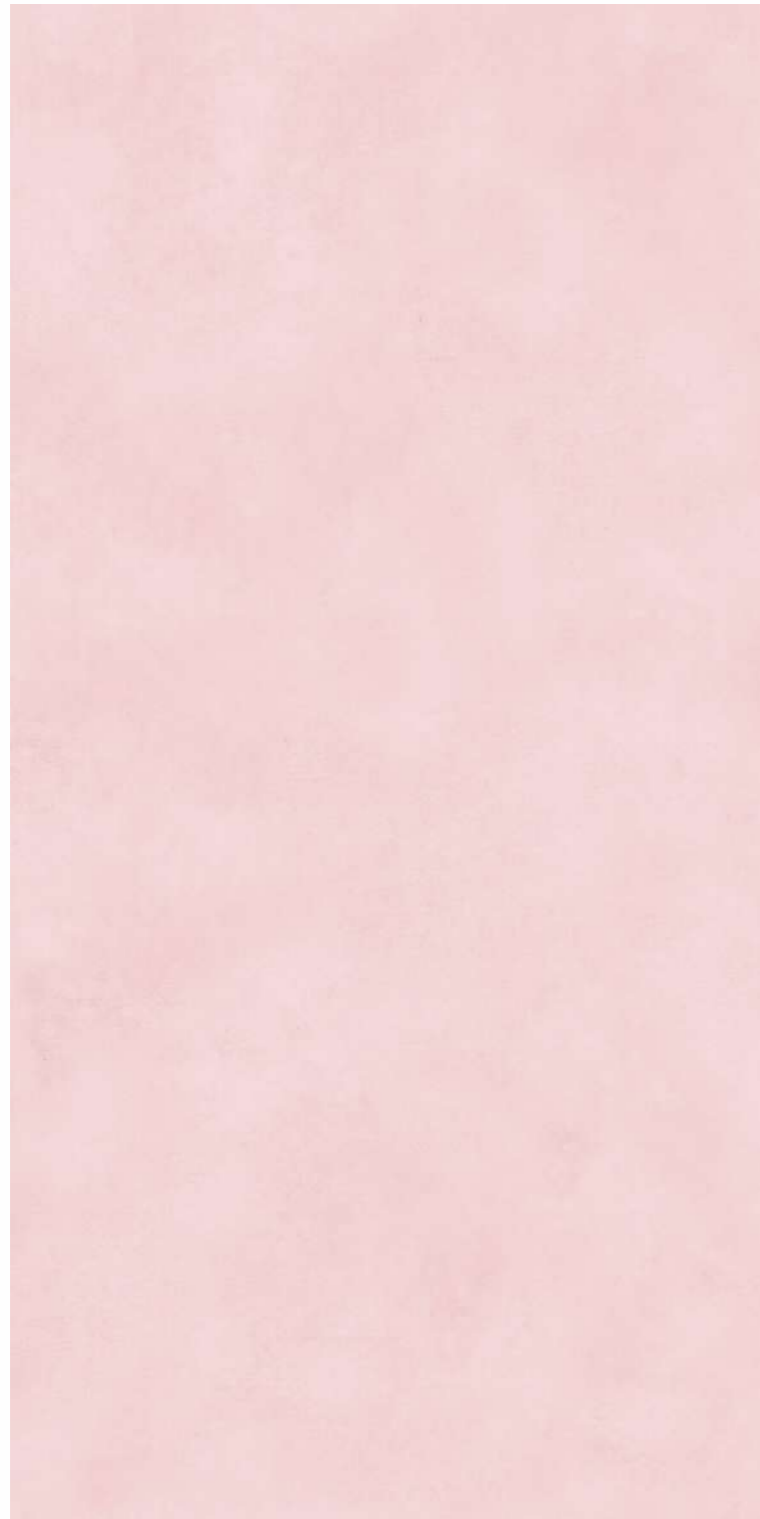

FINISH  
**MATT**


SIZE  
**600X1200MM**

THICKNESS  
**8.5MM**





**SKY RED**

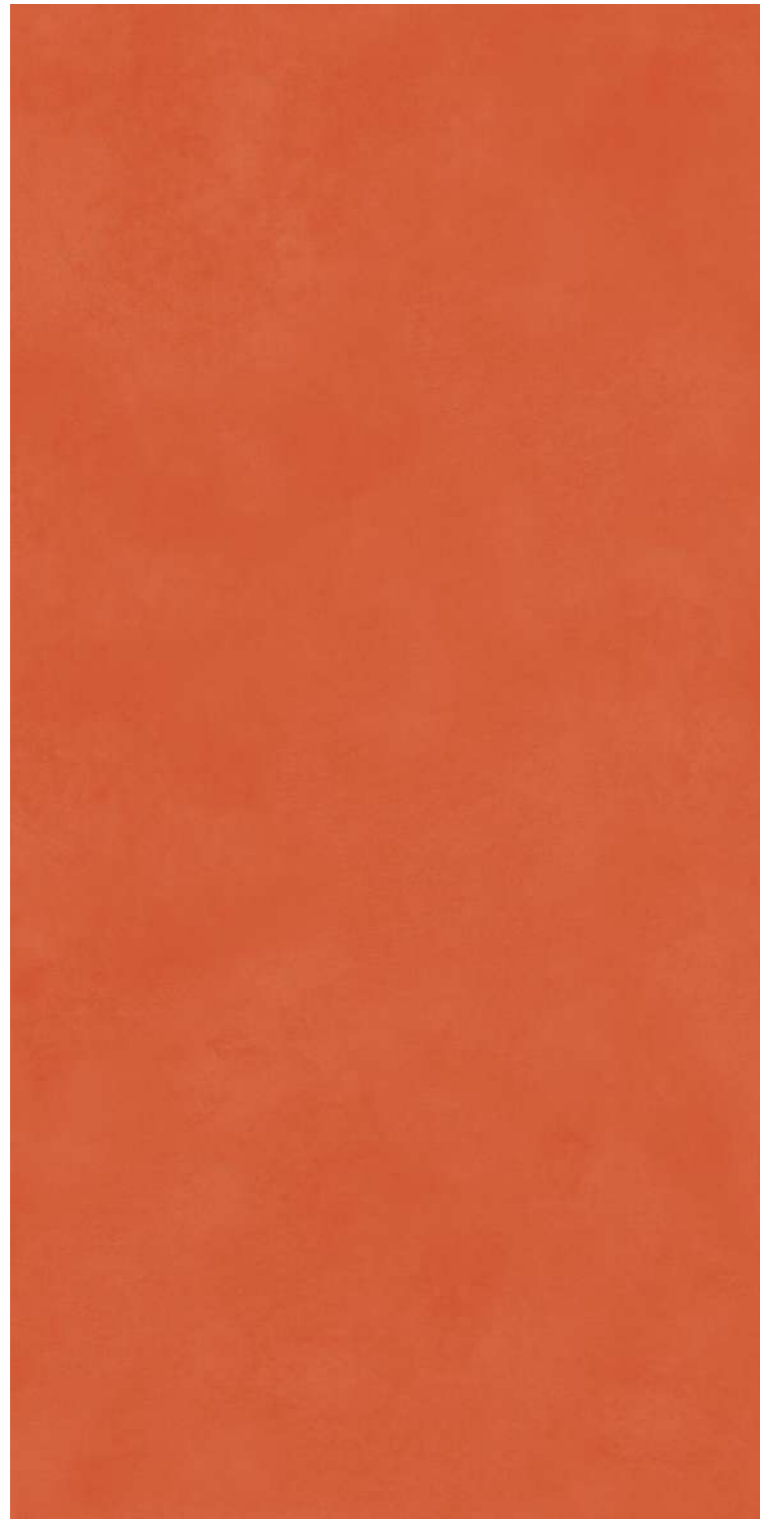

FINISH  
**MATT**


SIZE  
**600X1200MM**

THICKNESS  
**8.5MM**






**SKY TANGERINE**

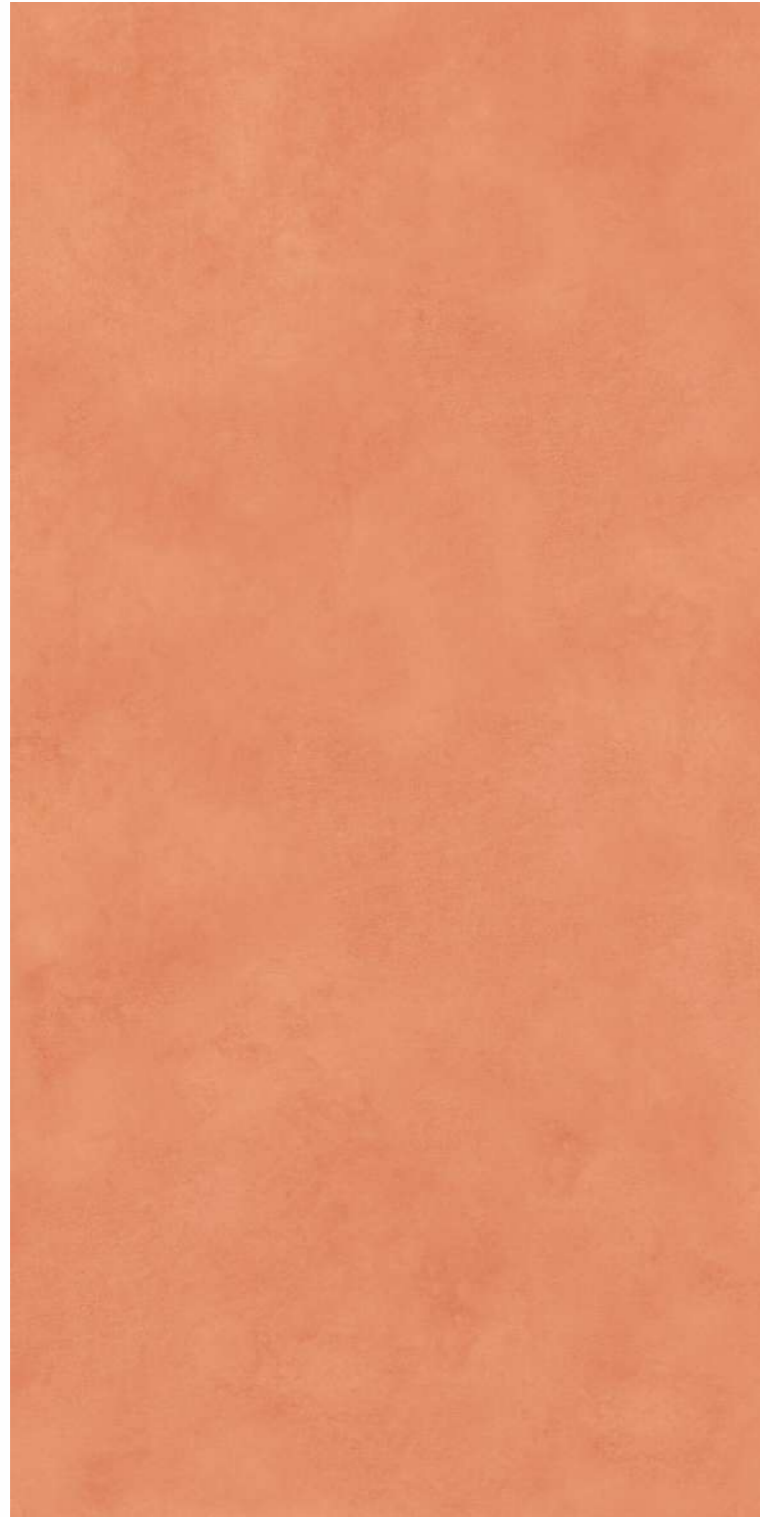

FINISH  
**MATT**

SIZE  
**600X1200MM**

THICKNESS  
**8.5MM**

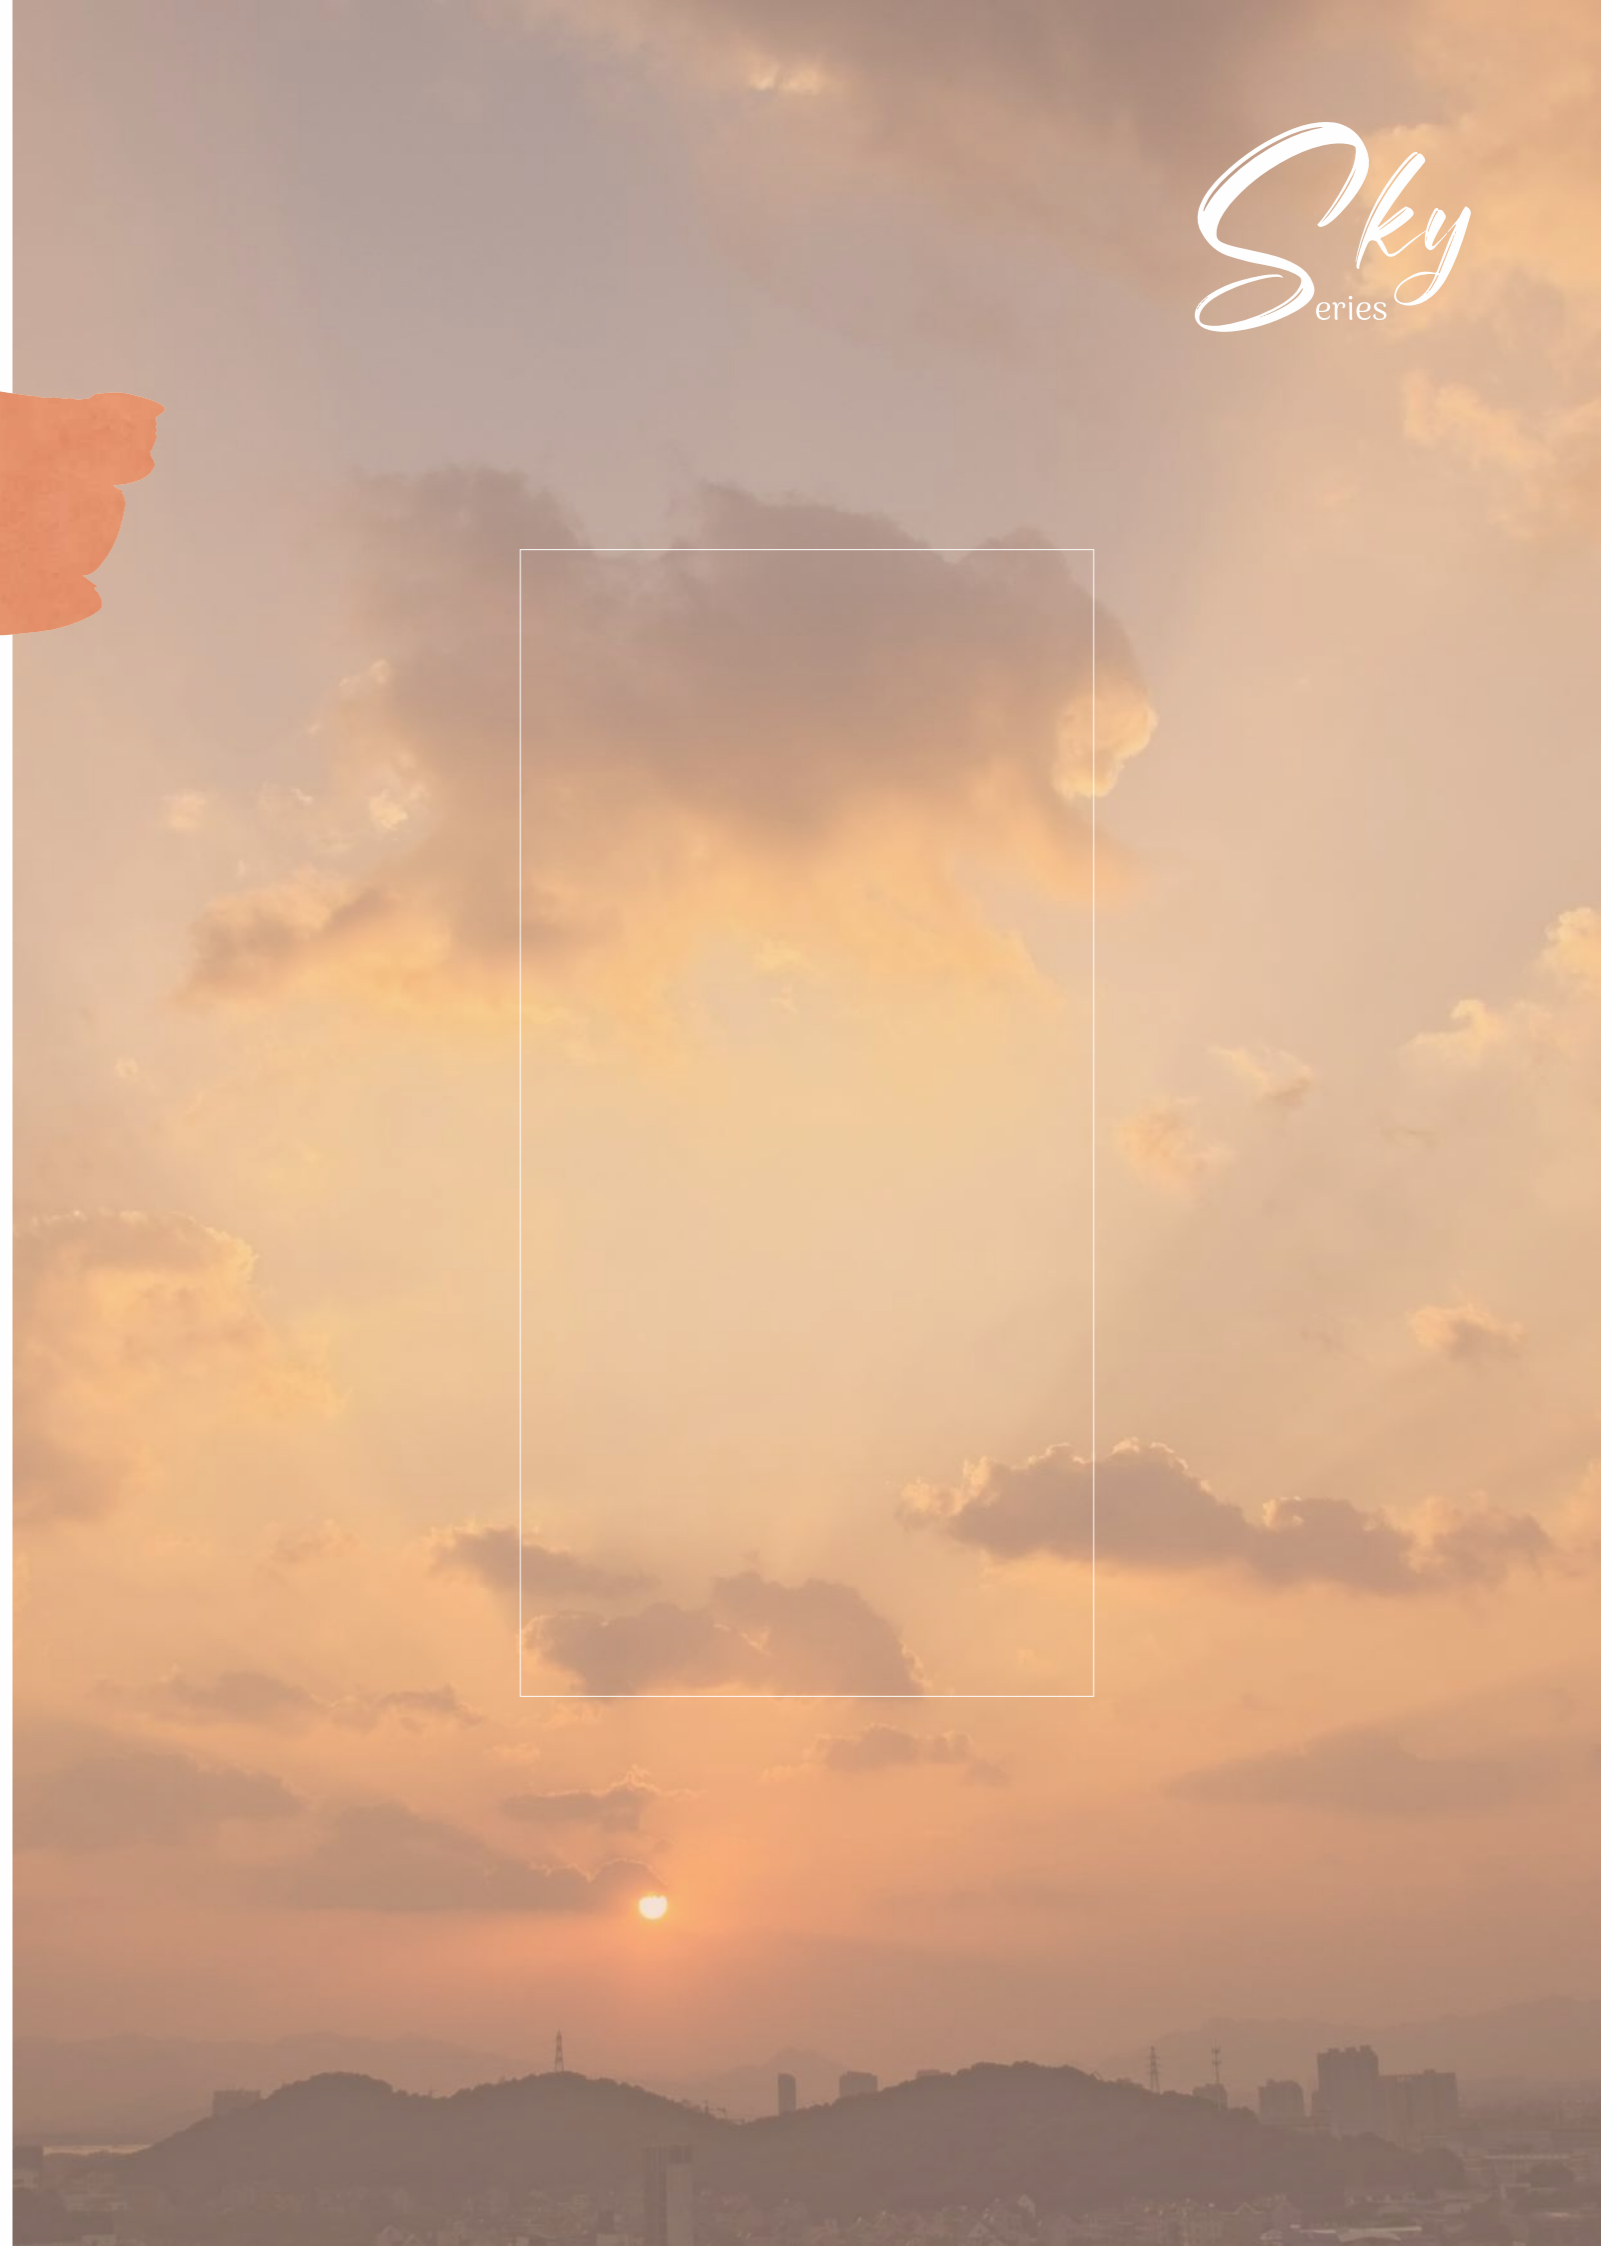




**SKY GRAY**



FINISH  
**MATT**

SIZE  
**600X1200MM**

THICKNESS  
**8.5MM**

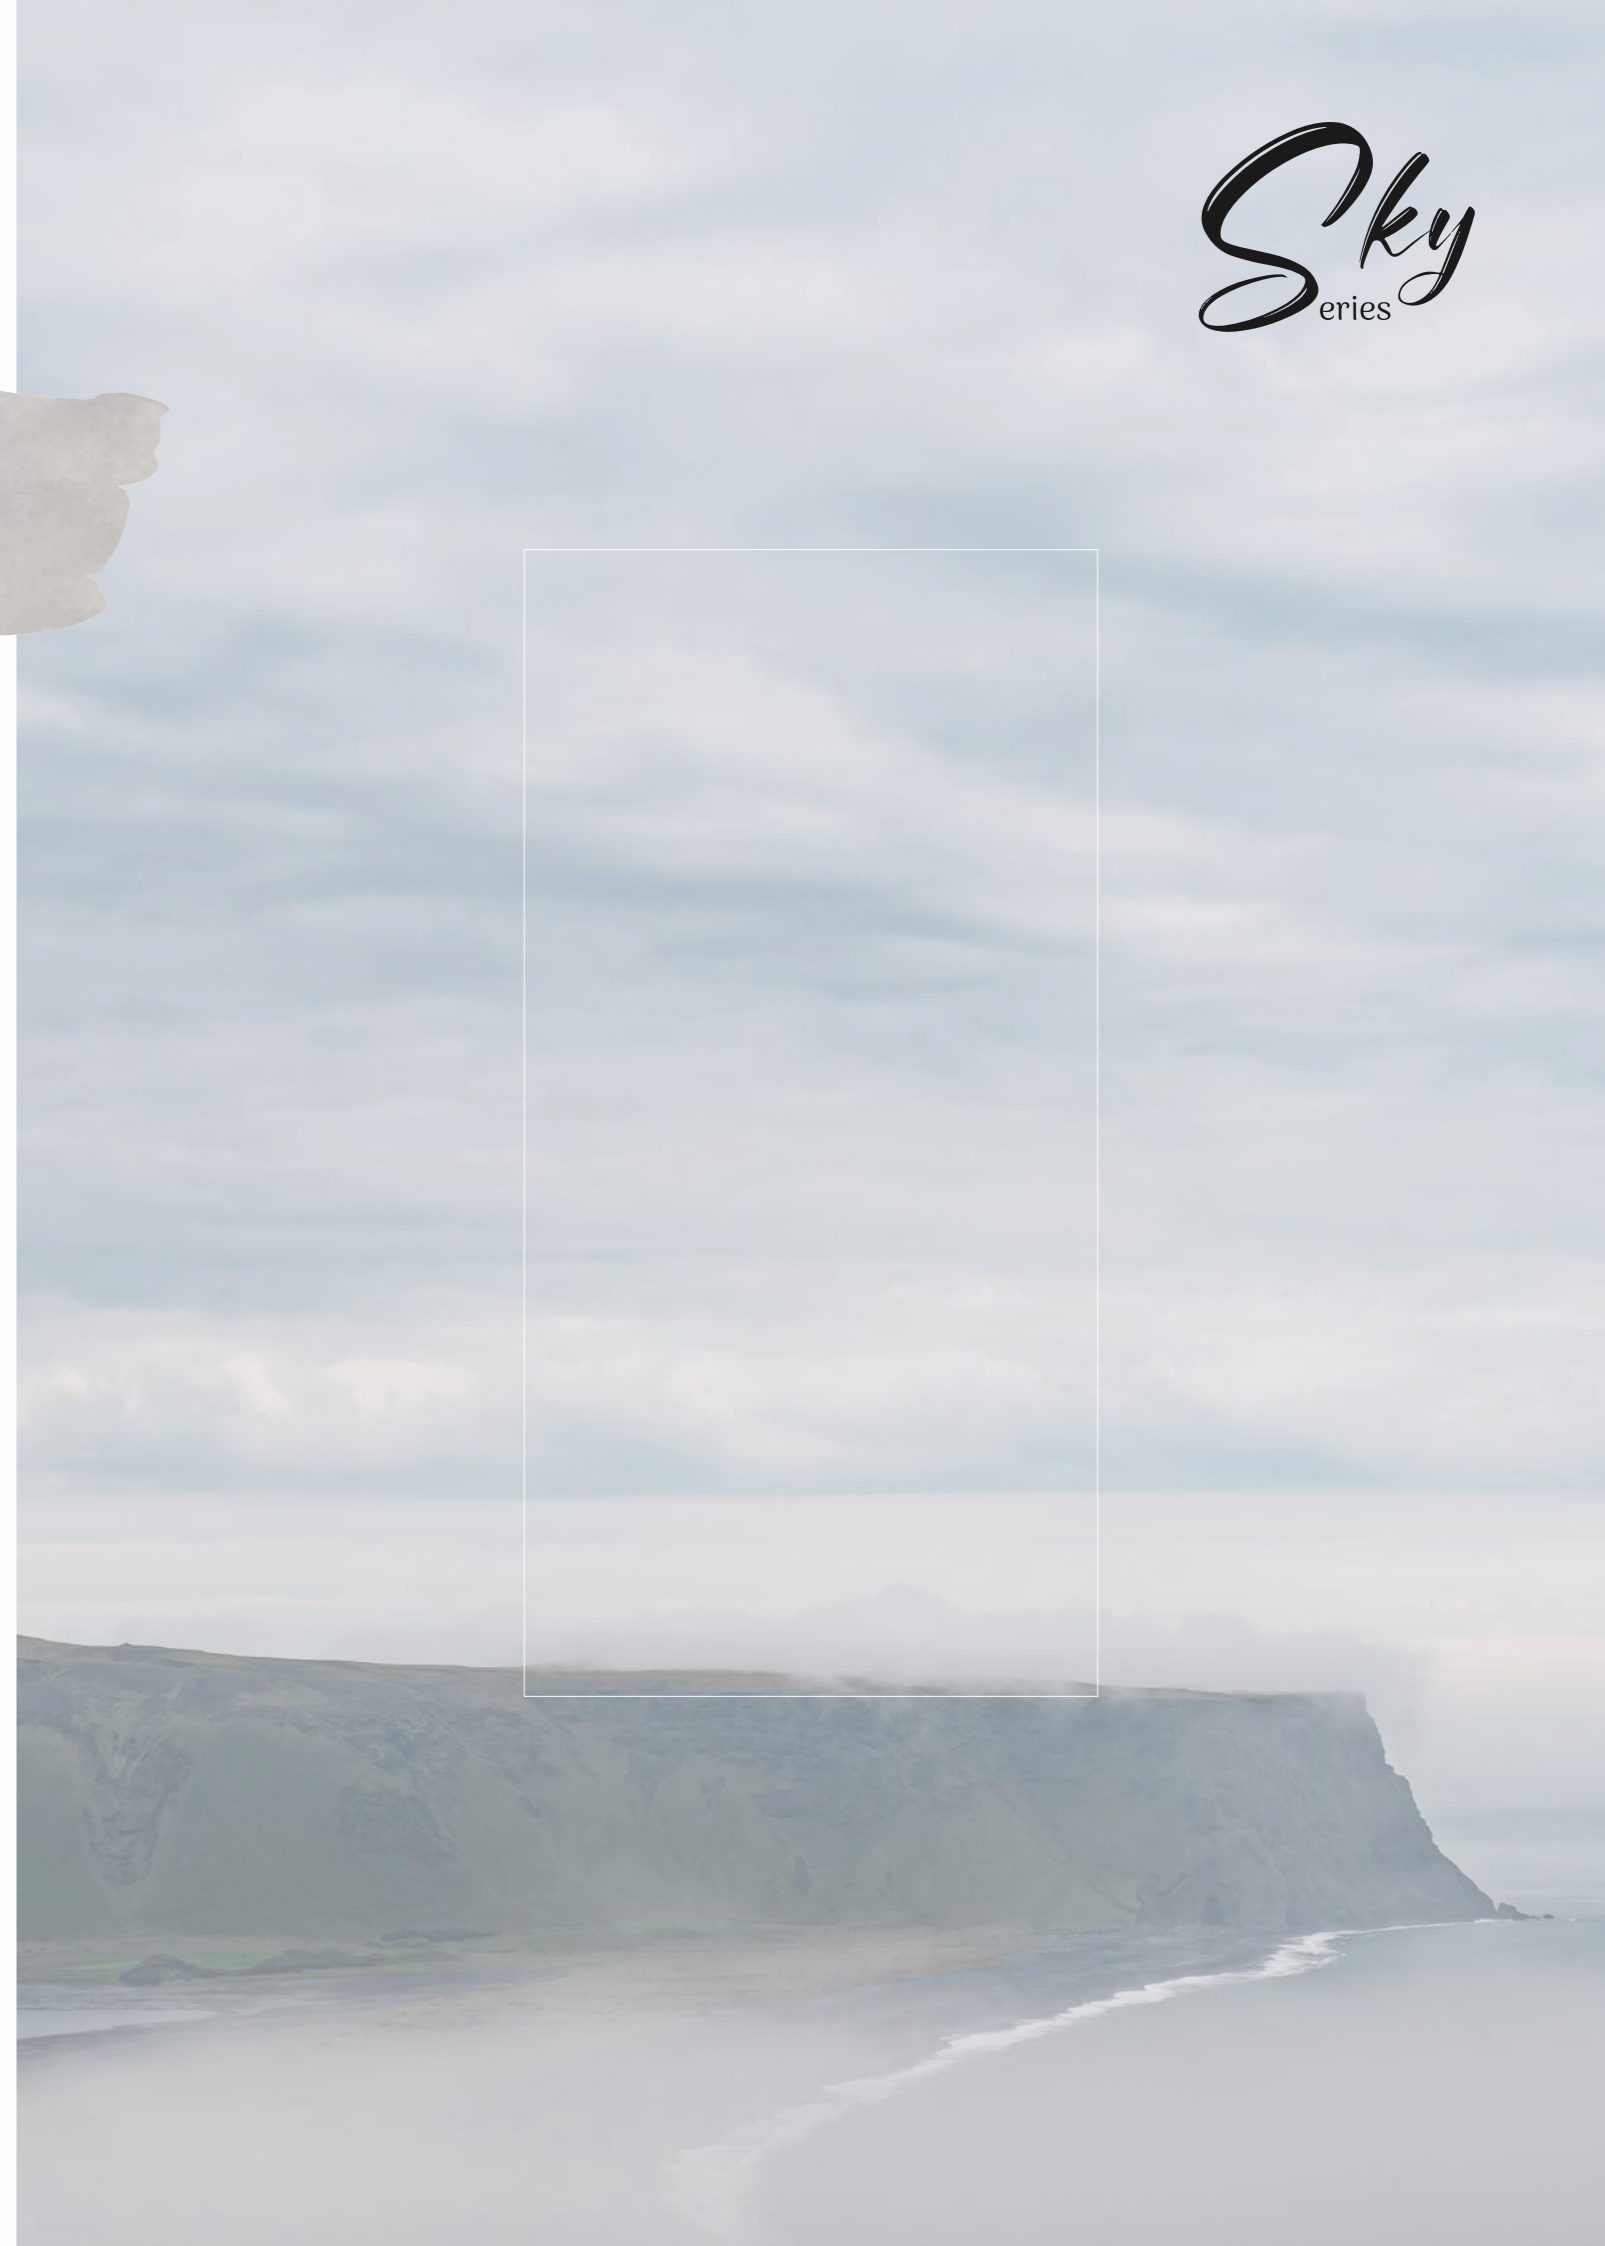



## TECHNICAL SPECIFICATION

CHARACTERISTIC	STANDARD AS PER ISO13006:2018/ EN14411 Gr.Bla	STANDARD AS PER IS 15622:2017 Gr.Bla	METHOD OF TESTING	MEAN VALUE OF GRUPPONUEVA
<b>Regulatory Properties</b>				
Deviation in Length and Width	±0.30 % (±1.00 mm)	±0.10 %	ISO 10545-2/IS 13630-1	± 0.10 %
Deviation in Thickness	±5.0 % (± 0.50 mm)	±5.0 %	ISO 10545-2/IS 13630-1	± 5.0 %
Straightness in Side	±0.30 % (± 0.80 mm)	±0.10 %	ISO 10545-2/IS 13630-1	± 0.10 %
Rectangularity	±0.30 % (±1.50 mm)	±0.10%	ISO 10545-2/IS 13630-1	± 0.10 %
Surface Flatness Central Curvature	±0.40 % ( ± 1.80 mm)	±0.50 %	ISO 10545-2/IS 13630-1	± 0.20 %
Surface Flatness Edge Curvature	±0.40 % ( ± 1.80 mm)	±0.50 %	ISO 10545-2/IS 13630-1	± 0.20 %
Surface Flatness Warpage	±0.40 % (± 1.80 mm)	±0.50 %	ISO 10545-2/IS 13630-1	± 0.10 %
Surface Quality	>95% defects free	>95% defects free	ISO 10545-2/IS 13630-1	>95% defects free
Small Color Difference (For Plain Colour)	ΔE <1.00	N.A.	ISO 10545-16	ΔE <0.80
Glossiness ( Polished)	As per Manufacturer	As per Manufacturer	Gloss Meter 60°	≥ 90
Glossiness (Satin/Posh)	As per Manufacturer	As per Manufacturer	Gloss Meter 60°	15 ≤ Glass Value ≤ 25
<b>Structural Properties</b>				
Water Absorption	≤0.50 %	≤0.080 %	ISO 10545-3/IS 13630-2	≤0.080 %
Bulk Density	As per Manufacturer	Min 2.20 g/cc	ISO 10545-3/IS 13630-2	> 2.28 gm/cc
<b>Massive Mechanical Properties</b>				
Modulus of Rupture	Min. 35.0 N/mm <sup>2</sup>	Min. 35.0 N/mm <sup>2</sup>	ISO 10545-4/IS 13630-6	Min. 40.0 N/mm <sup>2</sup>
Breaking Strength Thickness ≥7.5 mm	Min 13000 N	Min 13000 N	ISO 10545-4/IS 13630-6	Min 60000 N
<b>Surface Mechanical Properties</b>				
MOH'S Hardness #	As per Manufacturer	Min. 5	BS EN 15771/IS 13630-13	Polished Min 4**/Satin & Posh Min 6
Surface Abrasion Resistance #	As per Manufacturer	Min. Class II	ISO 10545-7/IS 13630-11	Polished Min II**/Satin,Posh & Matt Min III
<b>Thermal Hygrometric Properties</b>				
Moisture Expansion	Max 0.06% (0.6 mm/m)	Max 0.02 mm/m	ISO 10545-10/IS 13630-3	Max 0.02 mm/m
Thermal Expansion(COE) at 100°C	As per Manufacturer	Max. 6.0 x 10 <sup>-6</sup>	ISO 10545-8/IS 13630-4	Max. 6.0 x 10 <sup>-6</sup>
Thermal Shock Resistance	Min 10 Cycle	Min 10 Cycle	ISO 10545-9/IS 13630-5	Min 10 Cycle
Impact Resistance(COR) #	Min. 0.55	Min 0.55	ISO 10545-5/IS 13630-14	Min 0.55
Frost Resistance	As per Manufacturer	As per Manufacturer	ISO 10545-12/IS 13630-10	Frost Proof
Crazing Resistance at 7.5 bar	4 Cycle	4 Cycle	ISO 10545-11/IS 13630-9	4 Cycle
<b>Chemical Properties</b>				
Resistance to Staining Glazed	Min. Class 3	Min Class 1	ISO 10545-14/IS 13630-8	Min. Class 3/Min. Class 1
Resistance to Household Chemicals & Swimming Pool Salts Glazed	Min Class GB	Min Class AA	ISO 10545-13/IS 13630-8	Min Class GB/Min Class AA
Resistance to Low Concentrate Acid and Alkalis Glazed	As per Manufacturer	As per Manufacturer	ISO-10545-13/IS 13630-8	Min Class GLB****/ Min Class A****
Resistance to High Concentrate Acid and Alkalis Glazed	As per Manufacturer	As per Manufacturer	ISO-10545-13/IS 13630-8	Min Class GHB****/ Min Class A****
<b>Safety Properties</b>				
Skid Resistance -(DCOF-WET PENDULUM)##	As per Manufacturer	As per Manufacturer	BS 7976-2	Glossy ≥PO, Satin, Posh ≥PIMatt ≥P2
Slip Resistance -Satin/ Matt (DCOF- R Value )##	As per Manufacturer	As per Manufacturer	DIN 51130	R9 to R13
Lead and Cadmium release	As per Manufacturer	N.A.	ISO-10545-15	Does not yield Pb & Cd

\* Whichever is Lower

\*\* With nano technology (Polished Vitrefied tiles) Depending on Application area (low or high intensity of traffic)

\*\*\* Except Hydrofluoric Acid & it's compound

# Tiles Intended for use on floor

## For Floor tiles,as per customer requirement

## PACKING DETAILS

SIZE	ACTULE SIZE	THICKNESS	TILES / BOX	COVERAGE AREA / BOX
60x120cm	600x1200mm	9mm	2 pc	1.44 Sq. Ft. - 15.6 Sq. Ft.

GruppoNueva™

**GruppoNueva™**

[www.grupponueva.com](http://www.grupponueva.com)

8-A, Lakhdhirpur Road, Beside Narmada Canal, Morbi, Gujarat 363 642

✉ [hello@grupponueva.com](mailto:hello@grupponueva.com) ☎ +91 90992 88112